

Contents/产品目录

Blind Rivet 抽芯铆钉系列

Al Open Type Series 铝开口型系列



CAS	Colored Alu OPen Type /彩色开口型	P/34
AS	AL/ST Dome Head /铝/铁 开口型	P/35
ASC	AL/ST CSK Head /铝/铁 开口型沉头	P/36
ASLF	AL/ST Large Head /铝/铁 开口型大帽檐	P/37
AA	AL/AL Dome Head /全铝开口型	P/38
AB	AL/Stainless steel Dome Head /铝/不锈钢开口型	P/39

Steel Open Type Series 铁开口型系列



SS	ST/ST Dome Head /全铁开口型	P/41
SSC	ST/ST CSK Head /全铁开口型沉头	P/42
SSLF	ST/ST Large Head /全铁开口型大帽檐	P/43

Stainless Steel Open Type Series 不锈钢开口型系列



BB	SS/SS Dome Head /全不锈钢开口型	P/45
BBC	SS/SS CSK Head /全不锈钢开口型沉头	P/46
BBLF	SS/SS Large Head /全不锈钢开口型大帽檐	P/47
BS	SS/ST Dome Head /不锈钢/铁开口型	P/48
BSC	SS/ST CSK Head /不锈钢/铁开口型沉头	P/49

Closed End Type Series 封闭型系列



ASF	AL/ST Closed End Type /铝/铁封闭型	P/51
SSF	ST/ST Closed Dome Head /全铁封闭型	P/52
CSF	Copper/ST Closed Dome Head /铜铁封闭型	P/53
BBF	SS/SS Closed Dome Head /全不锈钢封闭型	P/54
BBFC	SS/SS Closed CSK Head /全不锈钢封闭型沉头	P/55

Multi-Grip Type Series 双鼓型系列



ASMG	AL/ST Multi-Grip Dome Head /铝铁双鼓型	P/57
ASMGC	AL/ST Multi-Grip CSK Head /铝铁双鼓型沉头	P/58
ASMGLF	AL/ST Multi-Grip Large Head /铝铁双鼓型大帽檐	P/59
ABMG	AL/SS Multi-Grip Dome Head /铝/不锈钢双鼓型	P/60
SSMG	ST/ST Multi-Grip Dome Head /全铁双鼓型	P/61
BBMG	SS/SS Multi-Grip Dome Head /全不锈钢双鼓型	P/62

Unigrip Type Series 单鼓型系列



ASNG	AL/ST Unigrip Dome Head /铝/铁单鼓型	P/64
ASNGC	AL/ST Unigrip CSK Head /铝/铁单鼓型沉头	P/65
ASNGLF	AL/ST Unigrip Large Head /铝/铁单鼓型大帽檐	P/66
ABNG	AL/SS Unigrip Dome Head /铝/不锈钢单鼓型	P/67
SSNG	ST/ST Unigrip Dome Head /全铁单鼓型	P/68
BBNG	SS/SS Dome Head /全不锈钢单鼓型	P/69

Blind Rivet 抽芯铆钉系列

Hem-Fix Type Series 海马型系列



SSH-A	ST/ST Hem-Fix Dome Head -A /全铁海马型A型	P/71
SSH-B	ST/ST Hem-Fix Dome Head -B /全铁海马型B型	P/72
SSHC-B	ST/ST Hem-Fix CSK Head /全铁海马沉头	P/73
AAH-B	AL/AL Hem-Fix Dome Head /全铝海马圆头	P/74
BBH-B	SS/SS Hem-Fix Dome Head /全不锈钢海马型	P/75
BBHC-B	SS/SS Hem-Fix CSK Head /全不锈钢海马型沉头	P/76

Mono Now-Lock type series 拉丝型系列



SSN	ST/ST Now-Lock Dome Head /全铁内锁拉丝	P/78
SSNC	ST/ST Now-Lock CSK Head /全铁内锁拉丝沉头	P/78
BBN	SS/SS Now-Lock Dome Head /全不锈钢内锁拉丝	P/79
BBNC	SS/SS Now-Lock CSK Head /全不锈钢内锁拉丝沉头	P/79
SSM	ST/ST Mono-Lock Dome Head /全铁外锁拉丝	P/80
SSMC	ST/ST Mono-Lock CSK Head /全铁外锁拉丝沉头	P/80
BBM	SS/SS Mono-Lock Dome Head /全不锈钢外锁拉丝	P/81
BBMC	SS/SS Mono-Lock CSK Head /全不锈钢外锁拉丝沉头	P/81

Tri-Firm Type Series 灯笼型系列



AAT	AL/AL Tri-Firm Dome Head /全铝灯笼型铆钉	P/82
------------	-----------------------------------	------

Peel Type Series 拉花型系列



ASP	AL/ST Peel Dome Head /铝铁拉花型铆钉	P/83
------------	-------------------------------	------

Grooved Type Series 沟槽型系列



ASG	AL/ST Grooved Dome Head /铝铁沟槽型铆钉	P/84
------------	----------------------------------	------

Ring Groove Type Series 环槽型系列



RG	ST/ST Ring Groove type SS/SS Ring Groove type /环槽铆钉	P/85
-----------	--	------

Explanation: AL=Aluminum , ST=Steel ,SS=Stainless Steel. CSK Head = Countersunk head

ALU OPEN TYPE SERIES

铝开口型系列



AS

Aluminum/Steel Dome Head
铝铁开口型抽芯铆钉

DH



ASC

Aluminum/Steel CSK Head
铝铁开口型沉头抽芯铆钉


CSK



ASLF


Aluminum/Steel Large Head
铝铁开口型大帽檐抽芯铆钉

LF




DH

Domed Head
圆头



CSK

Countersunk
沉头



LF

Large Flange
大帽



AA

Aluminum/Aluminum Open Type
全铝开口型抽芯铆钉

DH CSK LF



AB

Aluminum/Stainless Steel Open Type
铝不锈钢开口型抽芯铆钉

DH CSK LF



CAS

Colored Alu Open Type
彩色铝开口型抽芯铆钉

DH CSK LF

CAS

彩色铝开口型抽芯铆钉 Colored Alu Open Type



◎ Option available to color aluminium and steel type rivets.

◎ Three head style

- (a) Dome head
- (b) Countersunk head
- (c) Large flange head

Are selective widely for your application.

◎ All kinds of ral color are available on special request, providing a neat, uniformed finish.



Color selection


RAL Colors



◎ Sample colors are for reference only. please refer to an original ral color card for a precise color reproduction.

AS

铝铁开口型抽芯铆钉 Aluminum/Steel Dome Head

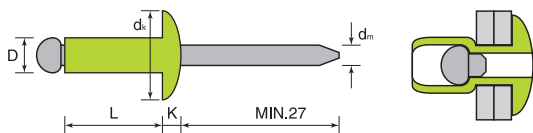

MATERIAL 材质

Body:5050Alu.5052Alu.5154Alu.5056Alu

铆体:5050铝.5052铝.5154铝.5056铝

Mandrel:Steel 钉芯:铁

FINISH 表面颜色

Body:Polished 铆体:抛光



Mandrel:Zinc Plated 钉芯:镀锌



D	L			dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
2.4 +0.08 -0.15	AS2404	4.0	0.5-2.0	4.2-5.0	1.0	1.6	2.5-2.6	5050Alu. 180N 5052Alu. 250N 5154Alu. 350N 5056Alu. 450N	5050Alu. 280N 5052Alu. 350N 5154Alu. 500N 5056Alu. 600N
	AS2406	6.0	2.0-4.0						
	AS2408	8.0	4.0-6.0						
	AS2410	10.0	6.0-8.0						
	AS2412	12.0	7.0-9.5						
	AS2414	14.0	8.0-11.5						
3.0 +0.08 -0.15	AS2416	16.0	10.0-13.0	5.4-6.3	1.3	2.00	3.1-3.2	5050Alu. 300N 5052Alu. 400N 5154Alu. 550N 5056Alu. 750N	5050Alu. 400N 5052Alu. 550N 5154Alu. 700N 5056Alu. 900N
	AS3006	6.0	1.0-3.5						
	AS3008	8.0	3.5-5.0						
	AS3010	10.0	5.0-7.0						
	AS3012	12.0	7.0-9.0						
	AS3014	14.0	9.0-11.0						
3.2 +0.08 -0.15	AS3016	16.0	9.0-12.5	5.8-6.7	1.3	2.00	3.3-3.4	5050Alu. 500N 5052Alu. 700N 5154Alu. 750N 5056Alu. 850N	5050Alu. 500N 5052Alu. 700N 5154Alu. 1000N 5056Alu. 1100N
	AS3018	18.0	12.0-14.5						
	AS3020	20.0	13.0-16.5						
	AS3206	6.0	1.0-3.5						
	AS3208	8.0	3.5-5.0						
	AS3210	10.0	5.0-7.0						
4.0 +0.08 -0.15	AS3212	12.0	7.0-9.0	6.9-8.4	1.7	2.50	4.1-4.2	5050Alu. 800N 5052Alu. 850N 5154Alu. 1100N 5056Alu. 1400N	5050Alu. 1000N 5052Alu. 1200N 5154Alu. 1700N 5056Alu. 2000N
	AS3214	14.0	9.0-11.0						
	AS3216	16.0	9.0-12.5						
	AS3218	18.0	12.0-14.5						
	AS3220	20.0	13.0-16.5						
	AS3225	25.0	15.0-21.0						
4.8 +0.08 -0.15	AS4006	6.0	1.0-3.0	8.3-10.1	2.0	3.0	4.9-5.0	5050Alu. 1300N 5052Alu. 1500N 5154Alu. 1700N 5056Alu. 2000N	5050Alu. 1500N 5052Alu. 1800N 5154Alu. 2500N 5056Alu. 3000N
	AS4008	8.0	3.0-5.0						
	AS4010	10.0	4.0-6.5						
	AS4012	12.0	6.0-8.5						
	AS4014	14.0	7.0-10.5						
	AS4016	16.0	8.0-12.5						
6.4 +0.08 -0.15	AS4018	18.0	10.0-14.5	11.6-13.4	2.7	3.90	6.5-6.6	5050Alu. 2200N 5052Alu. 2700N 5154Alu. 3400N 5056Alu. 3800N	5050Alu. 3000N 5052Alu. 3400N 5154Alu. 4850N 5056Alu. 5200N
	AS4020	20.0	12.0-16.0						
	AS4025	25.0	16.0-21.0						
	AS4030	30.0	21.0-26.0						
	AS4035	35.0	26.0-30.5						
	AS4040	40.0	30.5-35.0						
	AS4806	6.0	1.0-2.5						
	AS4808	8.0	2.5-4.0						
	AS4810	10.0	4.0-6.0						
	AS4812	12.0	6.0-8.0						
	AS4814	14.0	8.0-10.0						
	AS4816	16.0	8.0-12.0						
	AS4818	18.0	10.0-14.0						
	AS4820	20.0	12.0-16.0						
	AS4825	25.0	16.0-21.0						
	AS4830	30.0	21.0-25.0						
	AS4835	35.0	25.0-30.0						
	AS4840	40.0	30.0-35.0						
	AS4845	45.0	35.0-40.0						
	AS4850	50.0	40.0-45.0						
	AS6408	8.0	1.5-3.0						
	AS6410	10.0	2.0-4.0						
	AS6412	12.0	3.0-6.0						
	AS6414	14.0	6.0-8.0						
	AS6416	16.0	6.0-10.0						
	AS6418	18.0	8.0-12.0						
	AS6420	20.0	10.0-14.0						
	AS6425	25.0	14.0-18.0						
	AS6430	30.0	18.0-23.0						
	AS6435	35.0	23.0-28.0						
	AS6440	40.0	28.0-33.0						

ASC

铝铁开口型沉头抽芯铆钉 Aluminum/Steel CSK Head

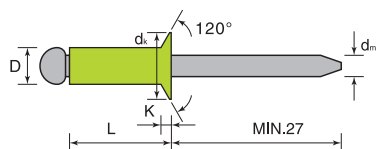

MATERIAL 材质

Body:5050Alu.5052Alu.5154Alu.5056Alu

铆体:5050铝.5052铝.5154铝.5056铝

Mandrel:Steel 钉芯:铁

FINISH 表面颜色

Body:Polished 铆体:抛光



Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
2.4 +0.08 -0.15	ASC2404	4.0	0.5-2.0	4.2-4.8	1.0	1.6	2.5-2.6	5050Alu. 180N 5052Alu. 250N 5154Alu. 350N 5056Alu. 450N	5050Alu. 280N 5052Alu. 350N 5154Alu. 500N 5056Alu. 600N
	ASC2406	6.0	2.0-4.0						
	ASC2408	8.0	4.0-6.0						
	ASC2410	10.0	6.0-8.0						
	ASC2412	12.0	7.0-9.5						
	ASC2414	14.0	8.0-11.5						
3.0 +0.08 -0.15	ASC2416	16.0	10.0-13.0	5.2-6.3	1.3	2.00	3.1-3.2	5050Alu. 300N 5052Alu. 400N 5154Alu. 550N 5056Alu. 750N	5050Alu. 400N 5052Alu. 550N 5154Alu. 700N 5056Alu. 900N
	ASC3006	6.0	1.0-3.5						
	ASC3008	8.0	3.5-5.0						
	ASC3010	10.0	5.0-7.0						
	ASC3012	12.0	7.0-9.0						
	ASC3014	14.0	9.0-11.0						
3.2 +0.08 -0.15	ASC3016	16.0	9.0-12.5	5.4-6.3	1.3	2.00	3.3-3.4	5050Alu. 400N 5052Alu. 500N 5154Alu. 750N 5056Alu. 850N	5050Alu. 500N 5052Alu. 700N 5154Alu. 1000N 5056Alu. 1100N
	ASC3018	18.0	12.0-14.5						
	ASC3020	20.0	13.0-16.5						
	ASC3206	6.0	1.0-3.5						
	ASC3208	8.0	3.5-5.0						
	ASC3210	10.0	5.0-7.0						
4.0 +0.08 -0.15	ASC3212	12.0	7.0-9.0	6.9-7.5	1.7	2.50	4.1-4.2	5050Alu. 800N 5052Alu. 850N 5154Alu. 1100N 5056Alu. 1400N	5050Alu. 1000N 5052Alu. 1200N 5154Alu. 1700N 5056Alu. 2000N
	ASC3214	14.0	9.0-11.0						
	ASC3216	16.0	9.0-12.5						
	ASC3218	18.0	12.0-14.5						
	ASC3220	20.0	13.0-16.5						
	ASC3225	25.0	15.0-21.0						
4.8 +0.08 -0.15	ASC4006	6.0	1.0-3.0	8.3-9.5	2.0	3	4.9-5.0	5050Alu. 1300N 5052Alu. 1500N 5154Alu. 1700N 5056Alu. 2000N	5050Alu. 1500N 5052Alu. 1800N 5154Alu. 2500N 5056Alu. 3000N
	ASC4008	8.0	3.0-5.0						
	ASC4010	10.0	4.0-6.5						
	ASC4012	12.0	6.0-8.5						
	ASC4014	14.0	7.0-10.5						
	ASC4016	16.0	8.0-12.5						
	ASC4018	18.0	10.0-14.5						
	ASC4020	20.0	12.0-16.0						
	ASC4025	25.0	16.0-21.0						
	ASC4030	30.0	21.0-26.0						
	ASC4035	35.0	26.0-30.5						
	ASC4040	40.0	30.5-35.0						
	ASC4806	6.0	1.0-2.5						
	ASC4808	8.0	2.5-4.0						
	ASC4810	10.0	4.0-6.0						
	ASC4812	12.0	6.0-8.0						
	ASC4814	14.0	8.0-10.0						
	ASC4816	16.0	8.0-12.0						
	ASC4818	18.0	10.0-14.0						
	ASC4820	20.0	12.0-16.0						
	ASC4825	25.0	16.0-21.0						
	ASC4830	30.0	21.0-25.0						
	ASC4835	35.0	25.0-30.0						
	ASC4840	40.0	30.0-35.0						
	ASC4845	45.0	35-40.0						
	ASC4850	50.0	40.0-45.0						

ASLF

铝/铁开口型大帽檐抽芯铆钉 Aluminum/Steel Large Head

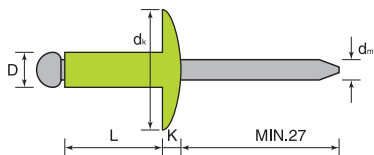

MATERIAL/材质:

Body:5050Alu.5052Alu.5154Alu.5056Alu

铆体:5050铝.5052铝.5154铝.5056铝

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Polished 铆体:抛光


Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/−0]	MIN−MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 −0.15	ASLF3206	6.0	1.0−3.5	9.5 +0.3 −0.7	2.0	2.00	3.3−3.4		
	ASLF3208	8.0	3.5−5.0					5050Alu. 400N	5050Alu. 500N
	ASLF3210	10.0	5.0−7.0						
	ASLF3212	12.0	7.0−9.0					5052Alu. 500N	5052Alu. 700N
	ASLF3214	14.0	9.0−11.0						
	ASLF3216	16.0	9.0−12.5					5154Alu. 750N	5154Alu. 1000N
	ASLF3218	18.0	12.0−14.5						
	ASLF3220	20.0	13.0−16.5					5056Alu. 850N	5056Alu. 1100N
	ASLF3225	25.0	15.0−21.0						
4.0 +0.08 −0.15	ASLF4006	6.0	1.0−3.0	12 +0.5 −1.0	2.2	2.50	4.1−4.2		
	ASLF4008	8.0	3.0−5.0						
	ASLF4010	10.0	4.0−6.5						
	ASLF4012	12.0	6.0−8.5					5050Alu. 800N	5050Alu. 1000N
	ASLF4014	14.0	7.0−10.5						
	ASLF4016	16.0	8.0−12.5					5052Alu. 850N	5052Alu. 1200N
	ASLF4018	18.0	10.0−14.5						
	ASLF4020	20.0	12.0−16.0					5154Alu. 1100N	5154Alu. 1700N
	ASLF4825	25.0	16.0−21.0						
	ASLF4830	30.0	21.0−26.0					5056Alu. 1400N	5056Alu. 2000N
	ASLF4835	35.0	26.0−30.5						
	ASLF4840	40.0	30.5−35.0						
4.8 +0.08 −0.15	ASLF4806	6.0	1.0−2.5	16 +0.5 −1.0	2.5	3	4.9−5.0		
	ASLF4808	8.0	2.5−4.0						
	ASLF4810	10.0	4.0−6.0						
	ASLF4812	12.0	6.0−8.0					5050Alu. 1300N	5050Alu. 1500N
	ASLF4814	14.0	8.0−10						
	ASLF4816	16.0	8.0−12.0					5052Alu. 1500N	5052Alu. 1800N
	ASLF4818	18.0	10.0−14.0						
	ASLF4820	20.0	12.0−16.0					5154Alu. 1700N	5154Alu. 2500N
	ASLF4825	25.0	16.0−21.0						
	ASLF4830	30.0	21.0−25.0					5056Alu. 2000N	5056Alu. 3000N
	ASLF4835	35.0	25.0−30.0						
	ASLF4840	40.0	30.0−35.0						
	ASLF4845	45.0	35.0−40.0						
	ASLF4850	50.0	40.0−45.0						

AA

全铝开口型抽芯铆钉 Aluminum/Aluminum Open Type



MATERIAL/材质:

Body:5050Alu. 铆体:5050铝

Mandrel:Aluminum Alloy

钉芯:铝合金

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Polished 钉芯:抛光




D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	AA3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	350	400
	AA3208	8.0	3.5-5.0						
	AA3210	10.0	5.0-7.0						
	AA3212	12.0	7.0-9.0						
	AA3214	14.0	9.0-11.0						
	AA3216	16.0	9.0-12.5						
	AA3218	18.0	12.0-14.5						
	AA3220	20.0	13.0-16.5						
4.0 +0.08 -0.15	AA3225	25.0	15.0-21.0	6.9-8.4	1.7	2.50	4.1-4.2	700.0	900.0
	AA4006	6.0	1.0-3.0						
	AA4008	8.0	3.0-5.0						
	AA4010	10.0	4.0-6.5						
	AA4012	12.0	6.0-8.5						
	AA4014	14.0	7.0-10.5						
	AA4016	16.0	8.0-12.5						
	AA4018	18.0	10.0-14.5						
	AA4020	20.0	12.0-16.0						
	AA4025	25.0	16.0-21.0						
	AA4030	30.0	21.0-26.0						
	AA4035	35.0	26.0-30.5						
4.8 +0.08 -0.15	AA4040	40.0	30.5-35.0	8.3-10.1	2.0	3	4.9-5.0	850	1300
	AA4806	6.0	1.0-2.5						
	AA4808	8.0	2.5-4.0						
	AA4810	10.0	4.0-6.0						
	AA4812	12.0	6.0-8.0						
	AA4814	14.0	8.0-10.0						
	AA4816	16.0	8.0-12.0						
	AA4818	18.0	10.0-14.0						
	AA4820	20.0	12.0-16.0						
	AA4825	25.0	16.0-21.0						
	AA4830	30.0	21.0-25.0						
	AA4835	35.0	25.0-30.0						
	AA4840	40.0	30.0-35.0						
	AA4845	45.0	35.0-40.0						
	AA4850	50.0	40.0-45.0						

DH CSK LF Countersunk, Large Head are available.

AB

铝/不锈钢开口型抽芯铆钉 Aluminum/Stainless Steel Open Type

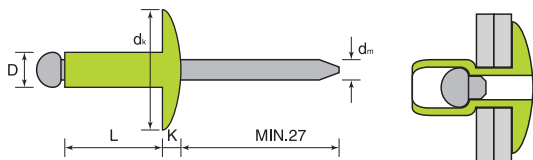

MATERIAL/材质:

Body:5056Alu. 铆体:5056铝

Mandrel:Stainless Steel

钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Polished 钉芯:抛光



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	AB3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	750	1000
	AB3208	8.0	3.5-5.0						
	AB3210	10.0	5.0-7.0						
	AB3212	12.0	7.0-9.0						
	AB3214	14.0	9.0-11.0						
	AB3216	16.0	9.0-12.5						
	AB3218	18.0	12.0-14.5						
	AB3220	20.0	13.0-16.5						
	AB3225	25.0	15.0-21.0						
4.0 +0.08 -0.15	AB4006	6.0	1.0-3.0	6.9-8.4	1.7	2.50	4.1-4.2	1100.0	1700.0
	AB4008	8.0	3.0-5.0						
	AB4010	10.0	4.0-6.5						
	AB4012	12.0	6.0-8.5						
	AB4014	14.0	7.0-10.5						
	AB4016	16.0	8.0-12.5						
	AB4018	18.0	10.0-14.5						
	AB4020	20.0	12.0-16.0						
	AB4825	25.0	16.0-21.0						
	AB4030	30.0	21.0-26.0						
	AB4035	35.0	26.0-30.5						
	AB4040	40.0	30.5-35.0						
4.8 +0.08 -0.15	AB4806	6.0	1.0-2.5	8.3-10.1	2.0	3	4.9-5.0	1700	2500
	AB4808	8.0	2.5-4.0						
	AB4810	10.0	4.0-6.0						
	AB4812	12.0	6.0-8.0						
	AB4814	14.0	8.0-10.0						
	AB4816	16.0	8.0-12.0						
	AB4818	18.0	10.0-14.0						
	AB4820	20.0	12.0-16.0						
	AB4825	25.0	16.0-21.0						
	AB4830	30.0	21.0-25.0						
	AB4835	35.0	25.0-30.0						
	AB4840	40.0	30.0-35.0						
	AB4845	45.0	35.0-40.0						
	AB4850	50.0	40.0-45.0						

DH **CSK** **LF** Countersunk, Large Head are available.

STEEL OPEN TYPE SERIES

铁开口型系列



SS

Steel/Steel Dome Head
全铁开口型抽芯铆钉

DH



SSC

Steel/Steel CSK Head
全铁开口型沉头抽芯铆钉


CSK



SSLF


Steel/Steel Large Head
全铁开口型大帽檐抽芯铆钉

LF




DH

Domed Head
圆头



CSK

Countersunk
沉头



LF

Large Flange
大帽

Blind Rivet Nuts

Blind Rivets



Self-Chinching

Weld Studs

Rivet tools

SS

全铁开口型抽芯铆钉 Steel/Steel Dome Head



MATERIAL/材质:

Body:steel 铆体:铁

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌



Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
2.4 +0.08 -0.15	SS2404	4.0	0.5-2.0	4.2-5.0	1.0	1.6	2.5-2.6	500	700
	SS2406	6.0	2.0-4.0						
	SS2408	8.0	4.0-6.0						
	SS2410	10.0	6.0-8.0						
	SS2412	12.0	7.0-9.5						
	SS2414	14.0	8.0-11.5						
3.0 +0.08 -0.15	SS2416	16.0	10.0-13.0	5.4-6.3	1.3	2.10	3.1-3.2	1000	1100
	SS3006	6.0	1.0-3.5						
	SS3008	8.0	3.5-5.0						
	SS3010	10.0	5.0-7.0						
	SS3012	12.0	7.0-9.0						
	SS3014	14.0	9.0-11.0						
3.2 +0.08 -0.15	SS3016	16.0	9.0-12.5	5.8-6.7	1.3	2.10	3.3-3.4	1100	1200
	SS3018	18.0	12.0-14.5						
	SS3020	20.0	13.0-16.5						
	SS3206	6.0	1.0-3.5						
	SS3208	8.0	3.5-5.0						
	SS3210	10.0	5.0-7.0						
4.0 +0.08 -0.15	SS3212	12.0	7.0-9.0	6.9-8.4	1.7	2.60	4.1-4.2	1700	2000
	SS3214	14.0	9.0-11.0						
	SS3216	16.0	9.0-12.5						
	SS4006	6.0	1.0-3.0						
	SS4008	8.0	3.0-5.0						
	SS4010	10.0	4.0-6.5						
4.8 +0.08 -0.15	SS4012	12.0	6.0-8.5	8.3-10.1	2.0	3.1	4.9-5.0	2900	3100
	SS4014	14.0	7.0-10.5						
	SS4016	16.0	8.0-12.5						
	SS4018	18.0	10.0-14.5						
	SS4020	20.0	12.0-16.0						
	SS4025	25.0	16.0-21.0						
6.4 +0.08 -0.15	SS4030	30.0	21.0-26.0	11.6-13.4	2.7	4.20	6.5-6.6	4900	5700
	SS4035	35.0	26.0-30.5						
	SS4040	40.0	30.5-35.0						
	SS4806	6.0	1.0-2.5						
	SS4808	8.0	2.5-4.0						
	SS4810	10.0	4.0-6.0						
	SS4812	12.0	6.0-8.0						
	SS4814	14.0	8.0-10.0						
	SS4816	16.0	9.0-12.0						
	SS4818	18.0	10.0-14.0						
	SS4820	20.0	12.0-16.0						
	SS4825	25.0	16.0-21.0						
	SS4830	30.0	21.0-25.0						
	SS4835	35.0	25.0-30.0						
	SS4840	40.0	30.0-35.0						
	SS4845	45.0	35.0-40.0						
	SS4850	50.0	40.0-45.0						
	SS6408	8.0	1.5-3.0						
	SS6410	10.0	2.0-4.0						
	SS6412	12.0	3.0-6.0						
	SS6414	14.0	6.0-8.0						
	SS6416	16.0	6.0-10.0						
	SS6418	18.0	8.0-12.0						
	SS6420	20.0	10.0-14.0						
	SS6425	25.0	14.0-18.0						
	SS6430	30.0	18.0-23.0						
	SS6435	35.0	23.0-28.0						
	SS6440	40.0	28.0-33.0						

SSC

全铁开口型沉头抽芯铆钉 Steel/Steel CSK Head

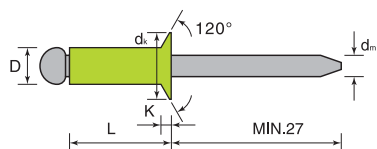

MATERIAL/材质:

Body:steel 铆体:铁

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌

Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.0 +0.08 -0.15	SSC3006	6.0	1.0-3.5	5.4-6.3	1.3	2.10	3.1-3.2	1000	1100
	SSC3008	8.0	3.5-5.0						
	SSC3010	10.0	5.0-7.0						
	SSC3012	12.0	7.0-9.0						
	SSC3014	14.0	9.0-11.0						
	SSC3016	16.0	9.0-12.5						
	SSC3018	18.0	12.0-14.5						
3.2 +0.08 -0.15	SSC3020	20.0	13.0-16.5	5.8-6.3	1.3	2.10	3.3-3.4	1100	1200
	SSC3206	6.0	1.0-3.5						
	SSC3208	8.0	3.5-5.0						
	SSC3210	10.0	5.0-7.0						
	SSC3212	12.0	7.0-9.0						
	SSC3214	14.0	9.0-11.0						
	SSC3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	SSC3218	18.0	12.0-14.5	6.9-7.5	1.7	2.60	4.1-4.2	1700	2000
	SSC3220	20.0	13.0-16.5						
	SSC3225	25.0	15.0-21.5						
	SSC4006	6.0	1.0-3.0						
	SSC4008	8.0	3.0-5.0						
	SSC4010	10.0	4.0-6.5						
	SSC4012	12.0	6.0-8.5						
4.8 +0.08 -0.15	SSC4014	14.0	7.0-10.5	8.3-9.5	2.0	3.1	4.9-5.0	2900	3100
	SSC4016	16.0	8.0-12.5						
	SSC4018	18.0	10.0-14.5						
	SSC4020	20.0	12.0-16.0						
	SSC4025	25.0	16.0-21.0						
	SSC4030	30.0	21.0-26.0						
	SSC4035	35.0	26.0-30.5						
4.8 +0.08 -0.15	SSC4040	40.0	30.5-35.0	8.3-9.5	2.0	3.1	4.9-5.0	2900	3100
	SSC4806	6.0	1.0-2.5						
	SSC4808	8.0	2.5-4.0						
	SSC4810	10.0	4.0-6.0						
	SSC4812	12.0	6.0-8.0						
	SSC4814	14.0	8.0-10.0						
	SSC4816	16.0	9.0-12.0						
4.8 +0.08 -0.15	SSC4818	18.0	10.0-14.0	8.3-9.5	2.0	3.1	4.9-5.0	2900	3100
	SSC4820	20.0	12.0-16.0						
	SSC4825	25.0	16.0-21.0						
	SSC4830	30.0	21.0-25.0						
	SSC4835	35.0	25.0-30.0						
	SSC4840	40.0	30.0-35.0						
	SSC4845	45.0	35.0-40.0						
4.8 +0.08 -0.15	SSC4850	50.0	40.0-45.0	8.3-9.5	2.0	3.1	4.9-5.0	2900	3100

Blind Rivet Nuts

Blind Rivets



Self-Chinching

Weld Studs

Rivet tools

SSLF

全铁开口型大帽檐抽芯铆钉 Steel/Steel large Head

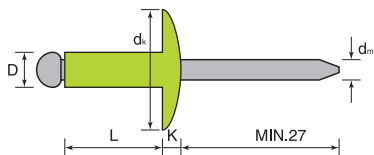

MATERIAL/材质:

Body:steel 铆体:铁

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌

Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	SSLF3206	6.0	1.0-3.5	9.5 +0.3 -0.7	2.0	2.10	3.3-3.4	1100	1200
	SSLF3208	8.0	3.5-5.0						
	SSLF3210	10.0	5.0-7.0						
	SSLF3212	12.0	7.0-9.0						
	SSLF3214	14.0	9.0-11.0						
	SSLF3216	16.0	9.0-12.5						
	SSLF3218	18.0	12.0-14.5						
	SSLF3220	20.0	13.0-16.5						
	SSLF3225	25.0	15.0-21.5						
4.0 +0.08 -0.15	SSLF4006	6.0	1.0-3.0	12 +0.5 -1.0	2.2	2.60	4.1-4.2	1700	2000
	SSLF4008	8.0	3.0-5.0						
	SSLF4010	10.0	4.0-6.5						
	SSLF4012	12.0	6.0-8.5						
	SSLF4014	14.0	7.0-10.5						
	SSLF4016	16.0	8.0-12.5						
	SSLF4018	18.0	10.0-14.5						
	SSLF4020	20.0	12.0-16.0						
	SSLF4025	25.0	16.0-21.0						
	SSLF4030	30.0	21.0-26.0						
4.8 +0.08 -0.15	SSLF4035	35.0	26.0-30.5	16 +0.5 -1.0	2.5	3.10	4.9-5.0	2900	3100
	SSLF4040	40.0	30.5-35.0						
	SSLF4806	6.0	1.0-2.5						
	SSLF4808	8.0	2.5-4.0						
	SSLF4810	10.0	4.0-6.0						
	SSLF4812	12.0	6.0-8.0						
	SSLF4814	14.0	8.0-10.0						
	SSLF4816	16.0	9.0-12.0						
	SSLF4818	18.0	10.0-14.0						
	SSLF4820	20.0	12.0-16.0						
	SSLF4825	25.0	16.0-21.0						
	SSLF4830	30.0	21.0-25.0						
	SSLF4835	35.0	25.0-30.0						
	SSLF4840	40.0	30.0-35.0						
	SSLF4845	45.0	35.0-40.0						
	SSLF4850	50.0	40.0-45.0						

STAINLESS STEEL OPEN TYPE SERIES

不锈钢开口型系列



BB
Stainless Steel
Stainless Steel Dome Head
全不锈钢开口型抽芯铆钉

DH




BBC
Stainless Steel
Stainless Steel CSK Head
全不锈钢开口型沉头抽芯铆钉

CSK




BBLF
Stainless Steel
Stainless Steel Large Head
全不锈钢开口型大帽檐抽芯铆钉


LF



DH
Domed Head
圆头



CSK
Countersunk
沉头



LF
Large Flange
大帽



BS
Stainless Steel/ Steel Dome Head
不锈钢/铁开口型抽芯铆钉

DH



BSC
Stainless Steel/Steel CSK Head
不锈钢/铁开口型沉头抽芯铆钉

CSK

Blind Rivet Nuts

Blind Rivets



Self-Chinching

Weld Studs

Rivet tools

BB

全不锈钢开口型抽芯铆钉 Stainless Steel/Stainless Steel Dome Head



MATERIAL/材质:

Body:stainless steel 铆体:不锈钢

Mandrel:stainless steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光


Mandrel:Polished 钉芯:抛光



D	L	dk	k	dm					
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.0 +0.08 -0.15	BB3006	6.0	1.0-3.5	5.4-6.3	1.3	2.10	3.1-3.2	1800.0	2200.0
	BB3008	8.0	3.5-5.0						
	BB3010	10.0	5.0-7.0						
	BB3012	12.0	7.0-9.0						
	BB3014	14.0	9.0-11.0						
	BB3016	16.0	9.0-12.5						
	BB3018	18.0	12.0-14.5						
3.2 +0.08 -0.15	BB3020	20.0	13.0-16.5	5.8-6.7	1.3	2.10	3.3-3.4	1900.0	2500.0
	BB3206	6.0	1.0-3.5						
	BB3208	8.0	3.5-5.0						
	BB3210	10.0	5.0-7.0						
	BB3212	12.0	7.0-9.0						
	BB3214	14.0	9.0-11.0						
	BB3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	BB3218	18.0	12.0-14.5	6.9-8.4	1.7	2.60	4.1-4.2	2700.0	3500.0
	BB3220	20.0	13.0-16.5						
	BB3225	25.0	15.0-21.5						
	BB4006	6.0	1.0-3.0						
	BB4008	8.0	3.0-5.0						
	BB4010	10.0	4.0-6.5						
	BB4012	12.0	6.0-8.5						
4.8 +0.08 -0.15	BB4014	14.0	7.0-10.5	8.3-10.1	2.0	3.1	4.9-5.0	4000	5000
	BB4016	16.0	8.0-12.5						
	BB4018	18.0	10.0-14.5						
	BB4020	20.0	12.0-16.0						
	BB4025	25.0	16.0-21.0						
	BB4030	30.0	21.0-26.0						
	BB4035	35.0	26.0-30.5						
6.4 +0.08 -0.15	BB4040	40.0	30.5-35.0	11.6-13.4	2.7	4.20	6.5-6.6	7500	9300
	BB4806	6.0	1.0-2.5						
	BB4808	8.0	2.5-4.0						
	BB4810	10.0	4.0-6.0						
	BB4812	12.0	6.0-8.0						
	BB4814	14.0	8.0-10.0						
	BB4816	16.0	9.0-12.0						
	BB4818	18.0	10.0-14.0						
	BB4820	20.0	12.0-16.0						
	BB4825	25.0	16.0-21.0						
	BB4830	30.0	21.0-25.0						
	BB4835	35.0	25.0-30.0						
	BB4840	40.0	30.0-35.0						
	BB4845	45.0	35.0-40.0						
	BB4850	50.0	40.0-45.0						
	BB6408	8.0	1.5-3.0						
	BB6410	10.0	2.0-4.0						
	BB6412	12.0	3.0-6.0						
	BB6414	14.0	6.0-8.0						
	BB6416	16.0	6.0-10.0						
	BB6418	18.0	8.0-12.0						
	BB6420	20.0	10.0-14.0						
	BB6425	25.0	14.0-18.0						
	BB6430	30.0	18.0-23.0						
	BB6435	35.0	23.0-28.0						
	BB6440	40.0	28.0-33.0						

BBC

全不锈钢开口型沉头抽芯铆钉 Stainless Steel/Stainless Steel Csk Head

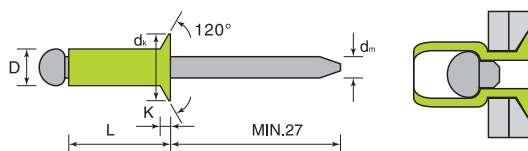

MATERIAL/材质:

Body:stainless steel 铆体:不锈钢

Mandrel:stainless steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光



Mandrel:Polished 钉芯:抛光



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.0 +0.08 -0.15	BBC3006	6.0	1.0-3.5	5.4-6.3	1.3	2.10	3.1-3.2	1800	2200
	BBC3008	8.0	3.5-5.0						
	BBC3010	10.0	5.0-7.0						
	BBC3012	12.0	7.0-9.0						
	BBC3014	14.0	9.0-11.0						
	BBC3016	16.0	9.0-12.5						
	BBC3018	18.0	12.0-14.5						
3.2 +0.08 -0.15	BBC3020	20.0	13.0-16.5	5.8-6.3	1.3	2.10	3.3-3.4	1900	2500
	BBC3206	6.0	1.0-3.5						
	BBC3208	8.0	3.5-5.0						
	BBC3210	10.0	5.0-7.0						
	BBC3212	12.0	7.0-9.0						
	BBC3214	14.0	9.0-11.0						
	BBC3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	BBC3218	18.0	12.0-14.5	6.9-7.5	1.7	2.60	4.1-4.2	2700	3500
	BBC3220	20.0	13.0-16.5						
	BBC3225	25.0	15.0-21.5						
	BBC4006	6.0	1.0-3.0						
	BBC4008	8.0	3.0-5.0						
	BBC4010	10.0	4.0-6.5						
	BBC4012	12.0	6.0-8.5						
4.8 +0.08 -0.15	BBC4014	14.0	7.0-10.5	8.3-9.5	2.0	3.1	4.9-5.0	4000	5000
	BBC4016	16.0	8.0-12.5						
	BBC4018	18.0	10.0-14.5						
	BBC4020	20.0	12.0-16.0						
	BBC4025	25.0	16.0-21.0						
	BBC4030	30.0	21.0-26.0						
	BBC4035	35.0	26.0-30.5						
	BBC4040	40.0	30.5-35.0						
	BBC4806	6.0	1.0-2.5						
	BBC4808	8.0	2.5-4.0						
	BBC4810	10.0	4.0-6.0						
	BBC4812	12.0	6.0-8.0						
	BBC4814	14.0	8.0-10.0						
	BBC4816	16.0	9.0-12.0						
	BBC4818	18.0	10.0-14.0						
	BBC4820	20.0	12.0-16.0						
	BBC4825	25.0	16.0-21.0						
	BBC4830	30.0	21.0-25.0						
	BBC4835	35.0	25.0-30.0						
	BBC4840	40.0	30.0-35.0						
	BBC4845	45.0	35.0-40.0						
	BBC4850	50.0	40.0-45.0						

BBLF

全不锈钢开口型大帽檐抽芯铆钉 Stainless Steel/Stainless Steel Large Head

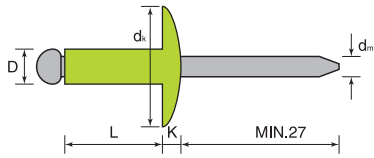

MATERIAL/材质:

Body:stainless Steel 铆体:不锈钢

Mandrel:stainless Steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光



Mandrel:Polished 钉芯:抛光



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	BBLF3206	6.0	1.0-3.5	9.5 +0.3 -0.7	2.0	2.10	3.3-3.4	1900	2500
	BBLF3208	8.0	3.5-5.0						
	BBLF3210	10.0	5.0-7.0						
	BBLF3212	12.0	7.0-9.0						
	BBLF3214	14.0	9.0-11.0						
	BBLF3216	16.0	9.0-12.5						
	BBLF3218	18.0	12.0-14.5						
	BBLF3220	20.0	13.0-16.5						
4.0 +0.08 -0.15	BBLF3225	25.0	15.0-21.5	12 +0.5 -1.0	2.2	2.60	4.1-4.2	2700	3500
	BBLF4006	6.0	1.0-3.0						
	BBLF4008	8.0	3.0-5.0						
	BBLF4010	10.0	4.0-6.5						
	BBLF4012	12.0	6.0-8.5						
	BBLF4014	14.0	7.0-10.5						
	BBLF4016	16.0	8.0-12.5						
	BBLF4018	18.0	10.0-14.5						
	BBLF4020	20.0	12.0-16.0						
	BBLF4025	25.0	16.0-21.0						
	BBLF4030	30.0	21.0-26.0						
	BBLF4035	35.0	26.0-30.5						
4.8 +0.08 -0.15	BBLF4040	40.0	30.5-35.0	16 +0.5 -1.0	2.5	3.1	4.9-5.0	4000	5000
	BBLF4806	6.0	1.0-2.5						
	BBLF4808	8.0	2.5-4.0						
	BBLF4810	10.0	4.0-6.0						
	BBLF4812	12.0	6.0-8.0						
	BBLF4814	14.0	8.0-10.0						
	BBLF4816	16.0	9.0-12.0						
	BBLF4818	18.0	10.0-14.0						
	BBLF4820	20.0	12.0-16.0						
	BBLF4825	25.0	16.0-21.0						
	BBLF4830	30.0	21.0-25.0						
	BBLF4835	35.0	25.0-30.0						
	BBLF4840	40.0	30.0-35.0						
	BBLF4845	45.0	35.0-40.0						
	BBLF4850	50.0	40.0-45.0						

BS

不锈钢/铁开口型抽芯铆钉 Stainless Steel/Steel Dome Head



MATERIAL/材质:

Body:stainless steel 铆体:不锈钢

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Polished 铆体:抛光



Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/−0]	MIN−MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.0 +0.08 −0.15	BS3006	6.0	1.0−3.5	5.4−6.3	1.3	2.10	3.1−3.2	1800.0	2200.0
	BS3008	8.0	3.5−5.0						
	BS3010	10.0	5.0−7.0						
	BS3012	12.0	7.0−9.0						
	BS3014	14.0	9.0−11.0						
	BS3016	16.0	9.0−12.5						
	BS3018	18.0	12.0−14.5						
	BS3020	20.0	13.0−16.5						
3.2 +0.08 −0.15	BS3206	6.0	1.0−3.5	5.8−6.7	1.3	2.10	3.3−3.4	1900.0	2500.0
	BS3208	8.0	3.5−5.0						
	BS3210	10.0	5.0−7.0						
	BS3212	12.0	7.0−9.0						
	BS3214	14.0	9.0−11.0						
	BS3216	16.0	9.0−12.5						
	BS3218	18.0	12.0−14.5						
	BS3220	20.0	13.0−16.5						
	BS3225	25.0	15.0−21.5						
4.0 +0.08 −0.15	BS4006	6.0	1.0−3.0	6.9−8.4	1.7	2.60	4.1−4.2	2700.0	3500.0
	BS4008	8.0	3.0−5.0						
	BS4010	10.0	4.0−6.5						
	BS4012	12.0	6.0−8.5						
	BS4014	14.0	7.0−10.5						
	BS4016	16.0	8.0−12.5						
	BS4018	18.0	10.0−14.5						
	BS4020	20.0	12.0−16.0						
	BS4025	25.0	16.0−21.0						
	BS4030	30.0	21.0−26.0						
	BS4035	35.0	26.0−30.5						
	BS4040	40.0	30.5−35.0						
4.8 +0.08 −0.15	BS4806	6.0	1.0−2.5	8.3−10.1	2.0	3.1	4.9−5.0	4000	5000
	BS4808	8.0	2.5−4.0						
	BS4810	10.0	4.0−6.0						
	BS4812	12.0	6.0−8.0						
	BS4814	14.0	8.0−10.0						
	BS4816	16.0	9.0−12.0						
	BS4818	18.0	10.0−14.0						
	BS4820	20.0	12.0−16.0						
	BS4825	25.0	16.0−21.0						
	BS4830	30.0	21.0−25.0						
	BS4835	35.0	25.0−30.0						
	BS4840	40.0	30.0−35.0						
	BS4845	45.0	35.0−40.0						
	BS4850	50.0	40.0−45.0						
6.4 +0.08 −0.15	BS6408	8.0	1.5−3.0	11.6−13.4	2.7	4.20	6.5−6.6	7500	9300
	BS6410	10.0	2.0−4.0						
	BS6412	12.0	3.0−6.0						
	BS6414	14.0	6.0−8.0						
	BS6416	16.0	6.0−10.0						
	BS6418	18.0	8.0−12.0						
	BS6420	20.0	10.0−14.0						
	BS6425	25.0	14.0−18.0						
	BS6430	30.0	18.0−23.0						
	BS6435	35.0	23.0−28.0						
	BS6440	40.0	28.0−33.0						

BSC

不锈钢/铁开口型沉头抽芯铆钉 Stainless Steel/Steel Csk Head

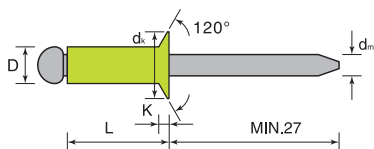

MATERIAL/材质:

Body:stainless Steel 铆体:不锈钢

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Zinc Plated 钉芯:镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.0 +0.08 -0.15	BSC3006	6.0	1.0-3.5	5.4-6.3	1.3	2.10	3.1-3.2	1800	2200
	BSC3008	8.0	3.5-5.0						
	BSC3010	10.0	5.0-7.0						
	BSC3012	12.0	7.0-9.0						
	BSC3014	15.0	9.0-11.0						
	BSC3016	16.0	9.0-12.5						
	BSC3018	18.0	12.0-14.5						
	BSC3020	20.0	13.0-16.5						
3.2 +0.08 -0.15	BSC3206	6.0	1.0-3.5	5.8-6.3	1.3	2.10	3.3-3.4	1900	2500
	BSC3208	8.0	3.5-5.0						
	BSC3210	10.0	5.0-7.0						
	BSC3212	12.0	7.0-9.0						
	BSC3214	14.0	9.0-11.0						
	BSC3216	16.0	9.0-12.5						
	BSC3218	18.0	12.0-14.5						
	BSC3220	20.0	13.0-16.5						
BSC3225	25.0	15.0-21.5							
4.0 +0.08 -0.15	BSC4006	6.0	1.0-3.0	6.9-7.5	1.7	2.60	4.1-4.2	2700	3500
	BSC4008	8.0	3.0-5.0						
	BSC4010	10.0	4.0-6.5						
	BSC4012	12.0	6.0-8.5						
	BSC4014	14.0	7.0-10.5						
	BSC4016	16.0	8.0-12.5						
	BSC4018	18.0	10.0-14.5						
	BSC4020	20.0	12.0-16.0						
	BSC4025	25.0	16.0-21.0						
	BSC4030	30.0	21.0-26.0						
BSC4035	35.0	26.0-30.5							
BSC4040	40.0	30.5-35.0							
4.8 +0.08 -0.15	BSC4806	6.0	1.0-2.5	8.3-9.5	2.0	3.1	4.9-5.0	4000	5000
	BSC4808	8.0	2.5-4.0						
	BSC4810	10.0	4.0-6.0						
	BSC4812	12.0	6.0-8.0						
	BSC4814	14.0	8.0-10.0						
	BSC4816	16.0	9.0-12.0						
	BSC4818	18.0	10.0-14.0						
	BSC4820	20.0	12.0-16.0						
	BSC4825	25.0	16.0-21.0						
	BSC4830	30.0	21.0-25.0						
	BSC4835	35.0	25.0-30.0						
	BSC4840	40.0	30.0-35.0						
	BSC4845	45.0	35.0-40.0						
	BSC4850	50.0	40.0-45.0						

CLOSED END TYPE SERIES

封闭型系列



ASD

Aluminum/Steel Closed End Type
铝铁封闭型抽芯铆钉

DH



SSD

Steel/Steel Closed End Type
全铁封闭型抽芯铆钉


DH



CSF


Copper/Steel Closed End Type
铜铁封闭型抽芯铆钉

DH



DH

Domed Head
圆头



CSK

Countersunk
沉头



BBF

Stainless Steel/ Stainless Steel
Dome Head
全不锈钢封闭型抽芯铆钉

DH





BBFC

Stainless Steel/ Stainless Steel
CSK Head
全不锈钢封闭型沉头抽芯铆钉

CSK

ASF

铝/铁封闭型抽芯铆钉 Aluminium/Steel Sealed Type



MATERIAL/材质:

Body: 5056 Alu. Alloy 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: Polished 铆体: 抛光



Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASF 320065	6.5	0.5-2.0	5.8-6.7	1.3	2.00	3.3-3.4	1070	1248
	ASF 320080	8.0	2.0-3.5						
	ASF 320095	9.5	3.5-5.0						
	ASF 320110	11.0	5.0-6.5						
	ASF 320125	12.5	6.5-8.0						
4.0 +0.08 -0.15	ASF 400080	8.0	0.5-3.5	6.9-8.4	1.7	2.45	4.1-4.2	1560	2140
	ASF 400095	9.5	3.5-5.0						
	ASF 400110	11.0	5.0-6.5						
	ASF 400125	12.5	6.5-8.0						
	ASF 400150	15.0	8.0-10.5						
4.8 +0.08 -0.15	ASF 480080	8.0	1.0-3.0	8.3-10.1	2.0	2.95	4.9-5.0	2228	3075
	ASF 480095	9.5	3.0-5.0						
	ASF 480110	11.0	5.0-6.5						
	ASF 480130	13.0	6.5-8.0						
	ASF 480145	14.5	8.0-9.5						
	ASF 480160	16.0	9.5-11.0						
	ASF 480180	18.0	11.0-13.0						
	ASF 480210	21.0	13.0-16.0						
	ASF 480250	25.0	16.0-20.0						
6.4 +0.08 -0.15	ASF 640125	12.5	1.5-6.0	11.6-13.4	2.7	3.9	6.5-6.6	4000	4900
	ASF 640160	16.0	6.0-8.5						
	ASF 640180	18.0	8.5-10.5						
	ASF 640200	20.0	10.5-12.5						
	ASF 640250	25.0	12.5-17.5						

SSF

全铁封闭型抽芯铆钉 Steel /Steel Sealed Type



MATERIAL/材质:

Body:Steel 铆体:铁

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌

Mandrel:Zinc Plated 钉芯:镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching



Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	SSF 320060	6.0	0.5-1.5	5.8-6.7	1.3	2.15	3.3-3.4	1150	1300
	SSF 320080	8.0	1.5-3.0						
	SSF 320095	9.5	3.0-5.0						
	SSF 320120	12.0	5.0-6.5						
4.0 +0.08 -0.15	SSF 400060	6.0	0.5-1.5	6.9-8.4	1.7	2.75	4.1-4.2	1700	1550
	SSF 400080	8.0	1.5-3.0						
	SSF 400100	10.0	3.0-5.0						
	SSF 400120	12.0	5.0-6.5						
	SSF 400150	15.0	6.5-10.5						
4.8 +0.08 -0.15	SSF 480080	8.0	0.5-3.0	8.3-10.1	2.0	3.20	4.9-5.0	2400	2800
	SSF 480100	10.0	3.0-5.0						
	SSF 480125	12.5	5.0-6.5						
	SSF 480150	15.0	6.5-10.5						
	SSF 480180	18.0	9.5-12.5						
6.4 +0.08 -0.15	SSF 480210	21.0	13.0-16.0	11.6-13.4	2.7	3.90	6.5-6.6	3600	4000
	SSF 640150	15.0	3.0-6.5						
	SSF 640160	16.0	6.5-8.0						
	SSF 640210	21.0	8.0-12.5						

CSF

铜/铁封闭型抽芯铆钉 Copper/ Steel Sealed Type



MATERIAL/材质:

Body:Copper 铆体:铜

Mandrel:Steel 钉芯:铁

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Zinc Plated 钉芯:镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching



Weld Studs

Rivet tools

D			L			dk	k	dm		
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)	
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.	
3.2 +0.08 -0.15	CSF 320065	6.5	0.5-2.0	5.8-6.7	1.3	2.00	3.3-3.4	980	1248	
	CSF 320080	8.0	2.0-3.5							
	CSF 320095	9.5	3.5-5.0							
	CSF 320125	12.5	5.0-8.0							
4.0 +0.08 -0.15	CSF 400080	8.0	0.5-3.0	6.9-8.4	1.7	2.45	4.1-4.2	1350	2000	
	CSF 400100	10.0	3.0-5.0							
	CSF 400120	12.0	5.0-6.5							
	CSF 400150	15.0	6.5-10.0							
4.8 +0.08 -0.15	CSF 480095	9.5	1.0-5.0	8.3-10.1	2.0	2.95	4.9-5.0	1950	2800	
	CSF 480115	11.5	5.0-6.5							
	CSF 480125	12.5	5.0-7.5							
	CSF 480150	15.0	7.5-10.0							

BBF

全不锈钢封闭型抽芯铆钉 All Stainless Steel Sealed Type



MATERIAL/材质:

Body:304 stainless Steel 铆体:不锈钢

Mandrel:420 stainless Steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Polished 铆体:抛光



Blind Rivet Nuts

Blind Rivets

Self-Chinching



Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	BBF-S 320060	6.0	0.5-1.5	5.8-6.7	1.3	2.15	3.3-3.4	2000	2200
	BBF-S 320080	8.0	1.5-3.0						
	BBF-S 320095	9.5	3.0-4.5						
	BBF-S 320120	12.0	5.0-6.5						
	BBF-S 320140	14.0	6.5-8.0						
4.0 +0.08 -0.15	BBF-S 400060	6.0	0.5-1.5	6.9-8.4	1.7	2.75	4.1-4.2	3000	3500
	BBF-S 400080	8.0	1.5-3.0						
	BBF-S 400095	9.5	3.0-5.0						
	BBF-S 400120	12.0	5.0-6.5						
	BBF-S 400140	14.0	6.5-8.0						
4.8 +0.08 -0.15	BBF-S 400160	16.0	8.0-11.0	8.3-10.1	2.0	3.2	4.9-5.0	4000	4400
	BBF-S 480080	8.0	0.5-3.0						
	BBF-S 480095	9.5	3.0-5.0						
	BBF-S 480120	12.0	5.0-6.5						
	BBF-S 480140	14.0	5.0-7.5						
	BBF-S 480160	16.0	6.5-9.0						
	BBF-S 480180	18.0	8.0-10.5						
6.4 +0.08 -0.15	BBF-S 480200	20.0	9.0-12.0	11.6-13.4	2.7	3.9	6.5-6.6	6000	8000
	BBF-S 640120	12.0	1.5-6.5						
	BBF-S 640160	16.0	6.5-8.0						
	BBF-S 640180	18.0	8.0-10.0						
	BBF-S 640200	20.0	8.0-12.0						
	BBF-S 640250	25.0	12.0-17.0						

BBFC

全不锈钢封闭型沉头抽芯铆钉 All Stainless Steel Sealed CSK Head

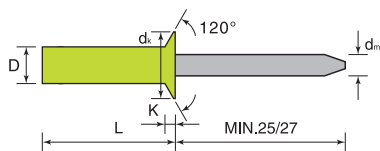

MATERIAL/材质:

Body:304 stainless Steel 铆体:不锈钢

Mandrel:420 stainless Steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Polished 钉芯:抛光



D	L								
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	BBFC 320060	6.0	0.5-1.5	5.8-6.7	1.3	2.15	3.3-3.4	2000	2200
	BBFC 320080	8.0	1.5-3.0						
	BBFC 320095	9.5	3.0-4.5						
	BBFC 320120	12.0	5.0-6.5						
	BBFC 320140	14.0	6.5-8.0						
4.0 +0.08 -0.15	BBFC 400060	6.0	0.5-1.5	6.9-8.4	1.7	2.75	4.1-4.2	3000	3500
	BBFC 400080	8.0	1.5-3.0						
	BBFC 400100	9.5	3.0-5.0						
	BBFC 400120	12.0	5.0-6.5						
	BBFC 400140	14.0	6.5-8.0						
4.8 +0.08 -0.15	BBFC 400160	16.0	8.0-11.0	8.3-10.1	2.0	3.2	4.9-5.0	4000	4400
	BBFC 480080	8.0	0.5-3.0						
	BBFC 480095	9.5	3.0-5.0						
	BBFC 480120	12.0	5.0-6.5						
	BBFC 480140	14.0	5.0-7.5						
	BBFC 480160	16.0	6.5-9.0						
	BBFC 480180	18.0	8.0-10.5						
BBFC 480200	20.0	9.0-12.0							
6.4 +0.08 -0.15	BBFC 640120	12.0	1.5-6.5	11.6-13.4	2.7	3.9	6.5-6.6	6000	8000
	BBFC 640160	16.0	6.5-8.0						
	BBFC 640180	18.0	8.0-10.0						
	BBFC 640200	20.0	8.0-12.0						
	BBFC 640250	25.0	12.0-17.0						

MULTI-GRIP TYPE SERIES

双鼓型系列



ASMГ

Aluminum/steel Dome Head
铝铁双鼓型抽芯铆钉

DH



ASMGC

Aluminum/steel Csk Head
铝铁双鼓型沉头抽芯铆钉


CSK



ASMGLF


Aluminum/steel Large head
铝铁双鼓型大帽檐抽芯铆钉

LF




DH

Domed Head
圆头



CSK

Countersunk
沉头



LF

Large Flange
大帽



ABMG

Aluminum/Stainless Steel Multi-Grip Type
铝不锈钢双鼓型抽芯铆钉

DH CSK LF



SSMG

All Steel Multi-Grip Type
全铁双鼓型抽芯铆钉

DH CSK LF





BBMG

All Stainless Steel Multi-Grip Type
全不锈钢双鼓型抽芯铆钉

DH CSK LF

ASMG

铝铁双鼓型抽芯铆钉 Aluminum/steel Dome Head



MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: polished 铆体: 抛光



Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASMG3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	650	850
	ASMG3208	8.0	1.5-5.0						
	ASMG3210	10.0	2.5-7.0						
	ASMG3212	12.0	4.5-9.0						
	ASMG3214	14.0	6.5-10.5						
	ASMG3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASMG4006	6.0	1.0-3.5	6.9-8.4	1.7	2.50	4.1-4.2	950	1500
	ASMG4008	8.0	1.5-5.0						
	ASMG4010	10.0	2.0-6.5						
	ASMG4012	12.0	3.5-8.5						
	ASMG4014	14.0	5.5-10.5						
	ASMG4016	16.0	6.0-12.5						
	ASMG4018	18.0	9.5-14.5						
	ASMG4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASMG4810	10.0	1.5-6.0	8.3-10.1	2.0	3.00	4.9-5.0	1320	2000
	ASMG4812	12.0	2.0-8.0						
	ASMG4814	14.0	3.5-9.5						
	ASMG4816	16.0	6.0-11.5						
	ASMG4818	18.0	8.0-13.5						
	ASMG4820	20.0	10.0-15.5						
	ASMG4822	22.0	12.0-17.5						
	ASMG4824	24.0	12.0-19.0						
	ASMG4827	27.0	17.0-22.0						
	ASMG4830	30.0	20.0-25.0						
6.4 +0.08 -0.15	ASMG64125	12.5	1.0-6.0	11.6-13.4	2.7	4.20	6.5-6.6	3800	4000
	ASMG64145	14.5	1.5-7.5						
	ASMG64165	16.5	2.0-9.0						
	ASMG64185	18.5	4.0-11.0						
	ASMG64205	20.5	5.5-12.5						
	ASMG64255	25.5	10.5-17.5						

ASMGC

铝铁双鼓型沉头抽芯铆钉 Aluminum/Steel Csk Head

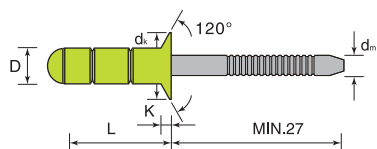

MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: polished 铆体: 抛光

Mandrel: Zinc Plated 钉芯: 镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching



Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASMGC3206	6.0	1.0-3.5	5.8-6.2	1.3	2.00	3.3-3.4	650	850
	ASMGC3208	8.0	1.5-5.0						
	ASMGC3210	10.0	2.5-7.0						
	ASMGC3212	12.0	4.5-9.0						
	ASMGC3214	14.0	6.5-10.5						
	ASMGC3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASMGC4006	6.0	1.0-3.0	6.9-7.5	1.7	2.50	4.1-4.2	950	1500
	ASMGC4008	8.0	1.5-5.0						
	ASMGC4010	10.0	2.0-6.5						
	ASMGC4012	12.0	3.5-8.5						
	ASMGC4014	14.0	5.5-10.5						
	ASMGC4016	16.0	6.0-12.5						
	ASMGC4018	18.0	9.5-14.5						
	ASMGC4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASMGC4810	10.0	1.5-6.0	8.3-9.5	2.0	3.00	4.9-5.0	1320	2000
	ASMGC4812	12.0	2.0-8.0						
	ASMGC4814	14.0	3.5-9.5						
	ASMGC4816	16.0	6.0-11.5						
	ASMGC4818	18.0	8.0-13.5						
	ASMGC4820	20.0	10.0-15.5						
	ASMGC4822	22.0	12.0-17.5						
	ASMGC4824	24.0	12.0-19.0						
	ASMGC4827	27.0	17.0-22.0						
	ASMGC4830	30.0	20.0-25.0						

ASMGLF

铝铁双鼓型大帽檐抽芯铆钉 Aluminum/steel Large Head

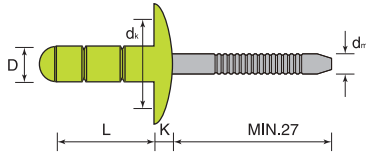

MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: polished 铆体: 抛光



Mandrel: Zinc Plated 钉芯: 镀锌



D	L			dk	k	dm	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA			
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASMGLF3206	6.0	1.0-3.5	9.5 +0.3 -0.7	2.0	2.00	3.3-3.4	650	850
	ASMGLF3208	8.0	1.5-5.0						
	ASMGLF3210	10.0	2.5-7.0						
	ASMGLF3212	12.0	4.5-9.0						
	ASMGLF3214	14.0	6.5-10.5						
	ASMGLF3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASMGLF4006	6.0	1.0-3.0	12 +0.5 -1.0	2.2	2.50	4.1-4.2	950	1500
	ASMGLF4008	8.0	1.5-5.0						
	ASMGLF4010	10.0	2.0-6.5						
	ASMGLF4012	12.0	3.5-8.5						
	ASMGLF4014	14.0	5.5-10.5						
	ASMGLF4016	16.0	6.0-12.5						
	ASMGLF4018	18.0	9.5-14.5						
	ASMGLF4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASMGLF4810	10.0	1.5-6.0	16 +0.5 -1.0	2.5	3.00	4.9-5.0	1320	2000
	ASMGLF4812	12.0	2.0-8.0						
	ASMGLF4814	14.0	3.5-9.5						
	ASMGLF4816	16.0	6.0-11.5						
	ASMGLF4818	18.0	8.0-13.5						
	ASMGLF4820	20.0	10.0-15.5						
	ASMGLF4822	22.0	12.0-17.5						
	ASMGLF4824	24.0	12.0-19.0						
	ASMGLF4827	27.0	17.0-22.0						
	ASMGLF4830	30.0	20.0-25.0						

ABMG

铝不锈钢双鼓型抽芯铆钉 Aluminum/stainless Steel Multi-Grip Type



MATERIAL/材质:

Body:Aluminum 铆体:铝

Mandrel:stainless Steel 钉芯:不锈钢

FINISH/表面颜色:

Body:polished 铆体:抛光

Mandrel:polished 钉芯:抛光



Blind Rivet Nuts

Blind Rivets

Self-Chinching



Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ABMG3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	650	850
	ABMG3208	8.0	1.5-5.0						
	ABMG3210	10.0	2.5-7.0						
	ABMG3212	12.0	4.5-9.0						
	ABMG3214	14.0	6.5-10.5						
	ABMG3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ABMG4006	6.0	1.0-3.0	6.9-8.4	1.7	2.5	4.1-4.2	950	1500
	ABMG4008	8.0	1.5-5.0						
	ABMG4010	10.0	2.0-6.5						
	ABMG4012	12.0	3.5-8.5						
	ABMG4014	14.0	5.5-10.5						
	ABMG4016	16.0	6.0-12.5						
	ABMG4018	18.0	9.5-14.5						
4.8 +0.08 -0.15	ABMG4020	20.0	11.5-16.5	8.3-10.1	2.0	3.0	4.9-5.0	1320	2000
	ABMG4810	10.0	1.5-6.0						
	ABMG4812	12.0	2.0-8.0						
	ABMG4814	14.0	3.5-9.5						
	ABMG4816	16.0	6.0-11.5						
	ABMG4818	18.0	8.0-13.5						
	ABMG4820	20.0	10.0-15.5						
	ABMG4822	22.0	12.0-17.5						
	ABMG4824	24.0	12.0-19.0						
	ABMG4827	27.0	17.0-22.0						
	ABMG4830	30.0	20.0-25.0						

SSMG

全铁双鼓型抽芯铆钉 All Steel Multi-Grip Type



MATERIAL/材质:

Body: carbon steel 铆体: 铁

Mandrel: carbon steel 钉芯: 铁

FINISH/表面颜色:

Body: Zinc Plated 铆体: 镀锌

Mandrel: Zinc Plated 钉芯: 镀锌





D		L		dk	k	dm				
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)	
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.	
DOME HEAD	3.2 (1/8")	SSMG3208	8.0	1.0-4.0	6.7	1.3	2.25	3.3-3.4	1000	1200
		SSMG3210	10.0	2.5-6.0						
		SSMG3212	12.0	1.5-8.0						
		SSMG3214	14.0	3.5-9.5						
		SSMG3216	16.0	5.5-11.5						
	4.0 (5/32")	SSMG4008	8	1.0-3.5	8.4	1.5	2.85	4.1-4.2	1500	2000
		SSMG4010	10	1.5-5.0						
		SSMG4012	12	3.5-7.0						
		SSMG4014	14	1.5-9.0						
		SSMG4016	16	3.5-11.0						
		SSMG4018	18	5.5-12.5						
		SSMG4020	20	7.5-14.5						
	4.8 (3/16")	SSMG4810	10	1.5-4.5	10.1	2.0	3.35	4.9-5.0	2400	2900
		SSMG4812	12	2.0-6.5						
		SSMG4814	14.0	3.0-8.5						
		SSMG4816	16	3.0-10.5						
		SSMG4818	18.0	5.0-12.5						
		SSMG4820	20.0	7.0-14.5						
		SSMG4822	22.0	9.0-16.5						
		SSMG4825	25.0	11.0-19.0						
		SSMG4827	27.0	13.0-21.0						
		SSMG4830	30.0	16.0-24.0						

DH **CSK** **LF** Countersunk Head, Large Flange are available.

BBMG

全不锈钢双鼓型抽芯铆钉 All Stainless Steel Multi-Grip Type



MATERIAL 材质

Body:stainless Steel 铆体:不锈钢

Mandrel:stainless Steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Natural 铆体:本色

Mandrel:Natural 钉芯:本色



Blind Rivet Nuts

Blind Rivets

Self-Chinching

Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
DOME HEAD	3.2 (1/8")	BBMG3208	8.0	6.7	1.3	2.25	3.3-3.4	1700	2000
		BBMG3210	10.0						
		BBMG3212	12.0						
		BBMG3214	14.0						
		BBMG3216	16.0						
		BBMG4008	8						
	4.0 (5/32")	BBMG4010	10	8.4	1.5	2.85	4.1-4.2	2700	3400
		BBMG4012	12						
		BBMG4014	14						
		BBMG4016	16						
		BBMG4018	18						
		BBMG4020	20						
		BBMG4810	10						
		BBMG4812	12						
	4.8 (3/16")	BBMG4814	14.0	10.1	2.0	3.35	4.9-5.0	4000	4500
		BBMG4816	16						
		BBMG4818	18.0						
		BBMG4820	20.0						
		BBMG4822	22.0						
		BBMG4825	25.0						
		BBMG4827	27.0						
		BBMG4830	30.0						

DH CSK LF Countersunk Head, Large Flange are available.

UNIGRIP TYPE SERIES

单鼓型系列



ASNG

Aluminum/Steel Dome Head
铝铁单鼓型抽芯铆钉

DH



ASNGC

Aluminum/Steel Csk Head
铝铁单鼓型沉头抽芯铆钉


CSK



ASNGLF


Aluminum/Steel Large Head
铝铁单鼓型大帽檐抽芯铆钉

LF




DH

Domed Head
圆头




CSK

Countersunk
沉头




LF

Large Flange
大帽



NG

Stainless Steel&Steel Unigrip Type
铁和不锈钢单鼓头形



ABNG

Aluminum/Stainless Steel Unigrip Type
铝不锈钢单鼓型抽芯铆钉

DH

CSK

LF



SSNG

All Steel Unigrip Type
全铁单鼓型抽芯铆钉

NG




BBNG

All Stainless Steel Unigrip Type
全不锈钢单鼓型抽芯铆钉

NG

ASNG

铝铁单鼓型抽芯铆钉 Aluminum/Steel Dome Head



MATERIAL 材质

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: Polished 铆体: 抛光

Mandrel: Zinc Plated 钉芯: 镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASNG3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	650	850
	ASNG3208	8.0	1.5-5.0						
	ASNG3210	10.0	2.5-7.0						
	ASNG3212	12.0	4.5-9.0						
	ASNG3214	14.0	6.5-10.5						
	ASNG3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASNG4006	6.0	1.0-3.0	6.9-8.4	1.7	2.50	4.1-4.2	950	1500
	ASNG4008	8.0	1.5-5.0						
	ASNG4010	10.0	2.0-6.5						
	ASNG4012	12.0	3.5-8.5						
	ASNG4014	14.0	5.5-10.5						
	ASNG4016	16.0	6.0-12.5						
	ASNG4018	18.0	9.5-14.5						
	ASNG4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASNG4810	10.0	1.5-6.0	8.3-10.1	2.0	3.00	4.9-5.0	1320	2000
	ASNG4812	12.0	2.0-8.0						
	ASNG4814	14.0	3.5-9.5						
	ASNG4816	16.0	6.0-11.5						
	ASNG4818	18.0	8.0-13.5						
	ASNG4820	20.0	10.0-15.5						
	ASNG4822	22.0	12.0-17.5						
	ASNG4824	24.0	12.0-19.0						
	ASNG4827	27.0	17.0-22.0						
	ASNG4830	30.0	20.0-25.0						

ASNGC

铝铁单鼓型沉头抽芯铆钉 Aluminum/steel Csk Head

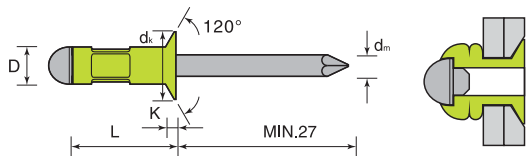

MATERIAL 材质

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: Polished 铆体: 抛光


Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASNGC3206	6.0	1.0-3.5	5.8-6.2	1.3	2.00	3.3-3.4	650	850
	ASNGC3208	8.0	1.5-5.0						
	ASNGC3210	10.0	2.5-7.0						
	ASNGC3212	12.0	4.5-9.0						
	ASNGC3214	14.0	6.5-10.5						
	ASNGC3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASNGC4006	6.0	1.0-3.0	6.9-7.5	1.7	2.50	4.1-4.2	950	1500
	ASNGC4008	8.0	1.5-5.0						
	ASNGC4010	10.0	2.0-6.5						
	ASNGC4012	12.0	3.5-8.5						
	ASNGC4014	14.0	5.5-10.5						
	ASNGC4016	16.0	6.0-12.5						
	ASNGC4018	18.0	9.5-14.5						
	ASNGC4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASNGC4810	10.0	1.5-6.0	8.3-9.5	2.0	3	4.9-5.0	1320	2000
	ASNGC4812	12.0	2.0-8.0						
	ASNGC4814	14.0	3.5-9.5						
	ASNGC4816	16.0	6.0-11.5						
	ASNGC4818	18.0	8.0-13.5						
	ASNGC4820	20.0	10.0-15.5						
	ASNGC4822	22.0	12.0-17.5						
	ASNGC4824	24.0	12.0-19.0						
	ASNGC4827	27.0	17.0-22.0						
	ASNGC4830	30.0	20.0-25.0						

ASNGLF

铝铁单鼓型大帽檐抽芯铆钉 Aluminum/Steel Large Head

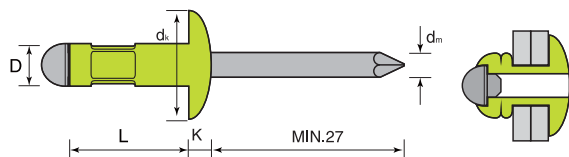

MATERIAL 材质

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: Polished 铆体: 抛光

Mandrel: Zinc Plated 钉芯: 镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ASNGLF3206	6.0	1.0-3.5	9.5 +0.3 -0.7	2.0	2.00	3.3-3.4	650	850
	ASNGLF3208	8.0	1.5-5.0						
	ASNGLF3210	10.0	2.5-7.0						
	ASNGLF3212	12.0	4.5-9.0						
	ASNGLF3214	14.0	6.5-10.5						
	ASNGLF3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ASNGLF4006	6.0	1.0-3.0	12 +0.5 -1.0	2.2	2.50	4.1-4.2	950	1500
	ASNGLF4008	8.0	1.5-5.0						
	ASNGLF4010	10.0	2.0-6.5						
	ASNGLF4012	12.0	3.5-8.5						
	ASNGLF4014	14.0	5.5-10.5						
	ASNGLF4016	16.0	6.0-12.5						
	ASNGLF4018	18.0	9.5-14.5						
	ASNGLF4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ASNGLF4810	10.0	1.5-6.0	16 +0.5 -1.0	2.5	3	4.9-5.0	1320	2000
	ASNGLF4812	12.0	2.0-8.0						
	ASNGLF4814	14.0	3.5-9.5						
	ASNGLF4816	16.0	6.0-11.5						
	ASNGLF4818	18.0	8.0-13.5						
	ASNGLF4820	20.0	10.0-15.5						
	ASNGLF4822	22.0	12.0-17.5						
	ASNGLF4824	24.0	12.0-19.0						
	ASNGLF4827	27.0	17.0-22.0						
	ASNGLF4830	30.0	20.0-25.0						

ABNG

铝不锈钢单鼓型抽芯铆钉 Aluminum/Stainless Steel Unigrip Head



MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Stainless steel 钉芯: 不锈钢

FINISH/表面颜色:

Body: Polished 铆体: 抛光


Mandrel: Polished 钉芯: 抛光



D	L		dk		k	dm	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA			
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 +0.08 -0.15	ABNG3206	6.0	1.0-3.5	5.8-6.7	1.3	2.00	3.3-3.4	650	850
	ABNG3208	8.0	1.5-5.0						
	ABNG3210	10.0	2.5-7.0						
	ABNG3212	12.0	4.5-9.0						
	ABNG3214	14.0	6.5-10.5						
	ABNG3216	16.0	9.0-12.5						
4.0 +0.08 -0.15	ABNG4006	6.0	1.0-3.0	6.9-8.4	1.7	2.50	4.1-4.2	950	1500
	ABNG4008	8.0	1.5-5.0						
	ABNG4010	10.0	2.0-6.5						
	ABNG4012	12.0	3.5-8.5						
	ABNG4014	14.0	5.5-10.5						
	ABNG4016	16.0	6.0-12.5						
	ABNG4018	18.0	9.5-14.5						
	ABNG4020	20.0	11.5-16.5						
4.8 +0.08 -0.15	ABNG4810	10.0	1.5-6.0	8.3-10.1	2.0	3	4.9-5.0	1320	2000
	ABNG4812	12.0	2.0-8.0						
	ABNG4814	14.0	3.5-9.5						
	ABNG4816	16.0	6.0-11.5						
	ABNG4818	18.0	8.0-13.5						
	ABNG4820	20.0	10.0-15.5						
	ABNG4822	22.0	12.0-17.5						
	ABNG4824	24.0	12.5-19.0						
	ABNG4827	27.0	17.0-22.0						
	ABNG4830	30.0	20.0-25.0						

SSNG

全铁单鼓型抽芯铆钉 All Steel Unigrip Type



MATERIAL/材质:

Body:carbon steel 铆体:铁

Mandrel:carbon steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌

Mandrel:Zinc Plated 钉芯:镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching

Weld Studs


Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
DOVE HEAD	3.2 (1/8")	SSNG32065	6.5	1.0-3.0	6.7	1.3	2.20	3.3-3.4	1200
		SSNG32095	9.5	3.0-5.0					1700
		SSNG32115	11.5	5.0-7.0					2500
	4.0 (5/32")	SSNG40075	7.5	1.0-3.0	8.4	1.7	2.80	4.1-4.3	2400
		SSNG40010	10	3.0-5.0					3500
		SSNG40125	12.5	5.0-7.0					4100
	4.8 (3/16")	SSNG48100	10	1.5-3.5	10.1	2	3.2	4.9-5.1	3600
		SSNG48125	12.5	3.5-6.0					4200
		SSNG48145	14.5	6.0-8.5					5600
		SSNG48165	16.5	7.5-10.0					5600
	6.0 (15/64")	SSNG60110	11.0	1.5-4.0	12.6	2.5	4	6.1-6.3	4200
		SSNG60130	13.0	3.0-6.0					5400
		SSNG60160	16.0	6.0-9.0					8500
		SSNG60190	19.0	9.0-12.0					8500
	6.4 (1/4")	SSNG64125	12.5	1.5-4.5	13.4	2.7	4.2	6.5-6.7	10000
		SSNG64145	14.5	3.0-6.5					11000
		SSNG64165	16.5	5.0-8.5					11000
		SSNG64195	19.5	8.0-11.5					11000

DH **CSK** **LF** Countersunk Head, Large Flange are available.

BBNG

全不锈钢单鼓型抽芯铆钉 All Stainless Steel Unigrip Type



MATERIAL/材质:


Body:stainless steel 铆体:不锈钢

Mandrel:stainless steel 钉芯:不锈钢

FINISH/表面颜色:

Body:Polished 铆体:抛光

Mandrel:Polished 铆体:抛光

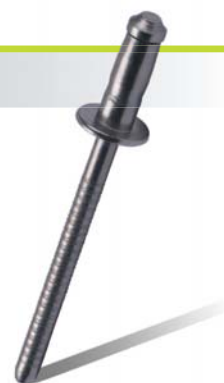

Blind Rivet Nuts

Blind Rivets

Self-Chinching

Weld Studs


Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
DOME HEAD	3.2 (1/8")	BBNG32065	6.5	1.0-3.0	6.7	1.3	2.20	1600	2000
		BBNG32095	9.5	3.0-5.0				1700	
		BBNG32115	11.5	5.0-7.0				3200	
	4.0 (5/32")	BBNG40075	7.5	1.0-3.0	8.4	1.7	2.80	4000	3500
		BBNG40010	10	3.0-5.0				5200	
		BBNG40125	12.5	5.0-7.0				5200	
	4.8 (3/16")	BBNG48100	10	1.5-3.5	10.1	2	3.4	5500	4500
		BBNG48125	12.5	3.5-6.0				5500	
		BBNG48145	14.5	6.0-8.5				5500	
		BBNG48165	16.5	7.5-10.0				5500	
	6.0 (15/64")	BBNG60110	11.0	1.5-4.0	12.6	2.5	4.2	7800	6200
		BBNG60130	13.0	3.0-6.0				9500	
		BBNG60160	16.0	6.0-9.0				9500	
		BBNG60190	19.0	9.0-12.0				9500	
	6.4 (1/4")	BBNG64125	12.5	1.5-4.5	13.4	2.7	4.8	10500	8300
		BBNG64145	14.5	3.0-6.5				13700	
		BBNG64165	16.5	5.0-8.5				13700	
		BBNG64195	19.5	8.0-11.5				13700	

DH **CSK** **LF** Countersunk Head, Large Flange are available.

HEM-LOK TYPE A SERIES


海马型系列 A型




DH
Domed Head
圆头

HEM-LOK TYPE B SERIES

海马型系列 B型




DH
Domed Head
圆头



CSK
Countersunk
沉头

SSH-A

全铁海马铆钉 All Steel Hem-Luk Type



MATERIAL/材质:

Body:carbon steel 铆体:铁

Mandrel:carbon steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌

Mandrel:Zinc Plated 钉芯:镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		[+1/-0] MAX	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
6.4 (1/4")	SSH-0812	13.7	1.50-3.50	13.4	3.4	4.2	6.7-6.9	10.5	8.8
	SSH-0813	15.0	2.80-4.80					12.0	8.8
	SSH-0814	15.6	3.35-5.35					12.5	8.8
	SSH-0815	17.0	4.80-6.80					12.5	8.8
	SSH-0817	19.0	6.80-8.80				6.6-6.8	14.0	8.8
	SSH-0818	19.7	7.50-9.50					15.0	8.8
	SSH-0819	21.0	8.80-10.80					16.0	8.8
	SSH-0821	23.0	10.80-12.80					16.0	8.8
	SSH-0823	25.0	12.80-14.80					16.0	8.8

SSH-B

全铁海马铆钉 All Steel Hem-Firm Dome Head Type



MATERIAL/材质:

Body:carbon steel 铆体:铁
Mandrel:carbon steel 钉芯:铁

FINISH/表面颜色:

Body:Zinc Plated 铆体:镀锌
Mandrel:Zinc Plated 钉芯:镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSH-B 4.8x9.0	9.0	1.50-3.50	10.20	2.50	3.10	4.9-5.1	4.5	3.5
	SSH-B 4.8x11.5	11.5	3.50-6.00					6.0	3.5
	SSH-B 4.8x14.0	14.0	6.00-8.50					6.2	3.5
	SSH-B 4.8x16.5	16.5	8.50-11.00					6.2	3.5
	SSH-B 4.8x19.0	19.0	11.00-13.50					6.2	3.5
6.4 (1/4")	SSH-B 6.4x9.0	9.0	1.50-3.50	13.4	3.50	4.20	6.7-6.9	6.8	6.4
	SSH-B 6.4x10.5	10.5	2.80-4.80					9.2	6.4
	SSH-B 6.4x12.5	12.5	4.80-6.80					10.0	6.4
	SSH-B 6.4x14.5	14.5	6.80-8.80					10.0	6.4
	SSH-B 6.4x16.5	16.5	8.80-10.80					11.0	6.4
	SSH-B 6.4x18.5	18.5	10.80-12.80					11.0	6.4
	SSH-B 6.4x20.5	20.5	12.80-14.80					11.0	6.4
	SSH-B 6.4x22.5	22.5	14.80-16.80					11.0	6.4
	SSH-B 6.4x24.5	24.5	16.80-18.80					11.0	6.4
	SSH-B 6.4x26.5	26.5	18.80-20.80					11.0	6.4
	SSH-B 6.4x28.5	28.5	20.80-22.80					11.0	6.4
	SSH-B 6.4x30.5	30.5	22.80-24.80					11.0	6.4
	SSH-B 6.4x32.5	32.5	24.80-26.80					11.0	6.4
	7.8 (5/16")	SSH-B 7.8x13.5	13.5					4.00-7.00	18.0
SSH-B 7.8x16.5		16.5	7.00-10.00	16.0	9.1				
SSH-B 7.8x19.5		19.5	10.00-13.00	16.0	9.1				
SSH-B 7.8x22.5		22.5	13.00-16.00	16.0	9.1				

SSHC-B

全铁海马沉头铆钉 All Steel Hem-Firm CSK Head Type



MATERIAL/材质:

Body: Carbon Steel 铆体: 铁
Mandrel: Carbon Steel 钉芯: 铁

FINISH/表面颜色:

Body: Zinc Plated 铆体: 镀锌
Mandrel: Zinc Plated 钉芯: 镀锌



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D	L			dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSHC-B 4.8x11.5	11.5	3.50-6.00	8.80	2.10	3.10	4.9-5.1	2.9	3.3
	SSHC-B 4.8x14.0	14.0	6.00-8.50					3.9	3.3
	SSHC-B 4.8x16.5	16.5	8.50-11.00					4.9	3.3
	SSHC-B 4.8x19.0	19.0	11.00-13.50					5.8	3.3
6.4 (1/4")	SSHC-B 6.4x11.5	11.5	3.80-5.80	10.2	2.5	4.20	6.7-6.9	5.3	5.4
	SSHC-B 6.4x13.5	13.5	5.80-7.80					7.3	5.4
	SSHC-B 6.4x15.5	15.5	7.80-9.80					9.3	5.4
	SSHC-B 6.4x17.5	17.5	9.80-11.80					10.0	5.4
	SSHC-B 6.4x19.5	19.5	11.80-13.80					10.0	5.4
	SSHC-B 6.4x21.5	21.5	13.80-15.80					10.0	5.4
	SSHC-B 6.4x23.5	23.5	15.80-17.80					10.0	5.4
	SSHC-B 6.4x25.5	25.5	17.80-19.80					10.0	5.4
	SSHC-B 6.4x27.5	27.5	19.80-21.80					10.0	5.4
	SSHC-B 6.4x29.5	29.5	21.80-23.80					10.0	5.4

AAH-B

全铝海马铆钉 All Aluminum Hem-Firm Dome Head Type



MATERIAL/材质:

Body: Aluminum alloy 铆体: 铝
Mandrel: Aluminum alloy 钉芯: 铝

FINISH/表面颜色:

Body: natural 铆体: 本色
Mandrel: natural 钉芯: 本色



Blind Rivet Nuts

Blind Rivets

Self-Chinching


Weld Studs

Rivet tools

D			L			dk	k	dm		
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)	
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.	
4.8 (3/16")	AAH-B 4.8x9.0	9.0	1.50-3.50	10.20	2.50	3.10	4.9-5.1	1.7	1.6	
	AAH-B 4.8x11.5	11.5	3.50-6.00					2.5	1.6	
	AAH-B 4.8x14.0	14.0	6.00-8.50					2.5	1.6	
	AAH-B 4.8x16.5	16.5	8.50-11.00					2.5	1.6	
	AAH-B 4.8x19.0	19.0	11.0-13.50					2.5	1.6	
	AAH-B 4.8x22.5	22.5	13.00-15.00					2.5	1.6	
6.4 (1/4")	AAH-B 6.4X10.5	10.5	2.80-4.80	13.4	3.5	4.20	6.6-6.8	4.2	3.4	
	AAH-B 6.4X12.5	12.5	4.80-6.80					4.5	3.4	
	AAH-B 6.4X14.5	14.5	6.80-8.80					4.9	3.4	
	AAH-B 6.4X16.5	16.5	8.80-10.80					4.9	3.4	
	AAH-B 6.4X18.5	18.5	10.80-12.80					4.9	3.4	
	AAH-B 6.4X20.5	20.5	12.80-14.80					4.9	3.4	
	AAH-B 6.4X22.5	22.5	14.80-16.80					4.9	3.4	
	AAH-B 6.4X24.5	24.5	16.80-18.80					4.9	3.4	
	AAH-B 6.4X26.5	26.5	18.80-20.80					4.9	3.4	

BBH-B

全不锈钢海马铆钉 All Stainless Steel Hem-Firm Dome Head Type



MATERIAL/材质:

Body: 304 Series Stainless Steel

铆体: 304不锈钢


Mandrel: 304 Series Stainless Steel

钉芯: 304不锈钢

FINISH/表面颜色:

Body: Natural 铆体: 本色


Mandrel: Natural 钉芯: 本色

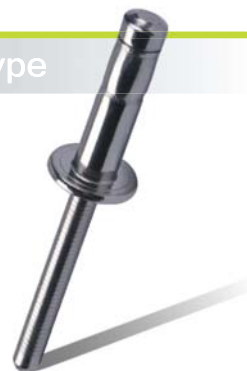

D	L	dk	k	dm					
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	BBH-B 4.8x9.0	9.0	1.50-3.50	10.20	2.50	3.10	4.9-5.1	6.0	4.9
	BBH-B 4.8x11.5	11.5	3.50-6.00					6.8	4.9
	BBH-B 4.8x14.0	14.0	6.00-8.50					6.8	4.9
	BBH-B 4.8x16.5	16.5	8.50-11.00					6.8	4.9
	BBH-B 4.8x19.0	19.0	11.00-13.00					6.8	4.9
6.4 (1/4")	BBH-B 6.4x10.5	10.5	2.00-4.50	13.4	3.5	4.20	6.6-6.7	14.0	8.3
	BBH-B 6.4x12.5	12.5	4.00-6.50					14.5	8.3
	BBH-B 6.4x14.5	14.5	6.00-8.50					14.5	8.3
	BBH-B 6.4x16.5	16.5	8.00-10.50				6.5-6.6	14.5	8.3
	BBH-B 6.4x18.5	18.5	10.00-12.50					14.5	8.3
	BBH-B 6.4x20.5	20.5	12.00-14.50					14.5	8.3
	BBH-B 6.4x22.5	22.5	13.00-16.00					14.5	8.3
	BBH-B 6.4x24.5	24.5	15.00-18.00					14.5	8.3
	BBH-B 6.4x26.5	26.5	17.00-20.00					14.5	8.3
	BBH-B 7.8x13.5	13.5	4.00-7.00	18.0	4.2	5.20	8.0-8.3	20.0	12.5
	BBH-B 7.8x16.5	16.5	7.00-10.00					21.5	12.5
	BBH-B 7.8x19.5	19.5	9.00-12.00					21.5	12.5
	BBH-B 7.8x22.5	22.5	12.00-15.00					21.5	12.5

BBHC-B

全不锈钢海马沉头铆钉 All Stainless Steel Hem-Firm CSK Head Type



MATERIAL/材质:

Body: 304 Series Stainless Steel

铆体: 304不锈钢

Mandrel: 304 Series Stainless Steel

钉芯: 304不锈钢

FINISH/表面颜色:

Body: Natural 铆体: 本色

Mandrel: Natural 钉芯: 本色



Blind Rivet Nuts

Blind Rivets

Self-Chinching

Weld Studs

Rivet tools

D	L		dk		k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
6.4 (1/4")	BBHC-B 6.4x13.5	13.5	4.80-7.80	10.20	2.50	4.20	6.6-6.8	10.7	8.3
	BBHC-B 6.4x15.5	15.5	6.80-9.80					12.7	8.3
	BBHC-B 6.4x17.5	17.5	8.80-11.80				6.6-6.7	13.7	8.3
	BBHC-B 6.4x19.5	19.5	10.80-13.80					13.7	8.3
	BBHC-B 6.4x21.5	21.5	12.80-15.80					13.7	8.3

LOCK TYPE SERIES 拉丝型系列



SSN

Steel Body And Steel Mandrel
(Now-lock Dome Head)
全铁口杯型内锁拉丝铆钉

NL



SSNC

Steel Body And Steel Mandrel
(Now-lock CSK Head)
全铁口杯型沉头内锁拉丝铆钉

NLC



BBN

Stainless Steel Body And
Stainless Steel Mandrel
(Now-lock Dome Head)
全不锈钢口杯型内锁拉丝铆钉


NL



BBNC


Stainless Steel Body And
Stainless Steel Mandrel
(Now-lock CSK Head)
全不锈钢口杯型沉头内锁拉丝铆钉

NLC




NL

Now-Lock
Dome Head
内锁圆头




NLC

Now-Lock
CSK Head
内锁沉头



ML

Mono-Lock
Dome Head
外锁圆头



MLC

Mono-Lock
CSK Head
外锁沉头



SSM

Steel Body And Steel Mandrel
(Mono-lock Dome Head)
全铁口杯型外锁拉丝铆钉

ML



SSMC

Steel Body And Steel Mandrel
(Mono-lock CSK Head)
全铁口杯型沉头外锁拉丝铆钉

MLC



BBM

Stainless Steel Body And
Stainless Steel Mandrel
(Mono-lock Dome Head)
全不锈钢口杯型外锁拉丝铆钉

ML




BBMC

Stainless Steel Body And
Stainless Steel Mandrel
(Mono-lock CSK Head)
全不锈钢口杯型沉头外锁拉丝铆钉

MLC

SSN

全铁口杯型内锁拉丝铆钉 Steel Body And Steel Mandrel (Now-lock Dome Head)



MATERIAL/材质:

Body: Carbon Steel 铆体: 铁
Mandrel: Carbon Steel 钉芯: 铁

FINISH/表面颜色:


Body: Zinc Plated 铆体: 镀锌
Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSN-4.8x10.0	18.2	1.58-6.85	10.20	2.30	3.10	4.9-5.1	5.6	4.4
	SSN-4.8x14.0	24.6	1.58-11.09					5.6	4.4
6.4 (1/4")	SSN-6.4x14.0	25.3	2.04-9.52	13.5	2.9	4.10	6.7-7.0	10.5	8.2
	SSN-6.4x20.0	35.6	2.04-15.87					10.5	8.2

SSNC

全铁口杯型沉头内锁拉丝铆钉 Steel Body And Steel Mandrel (Now-lock CSK Head)

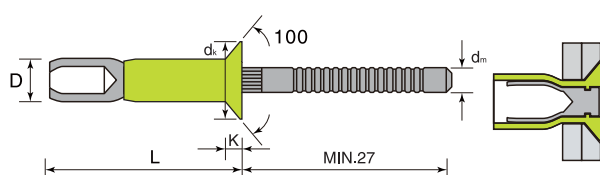

MATERIAL/材质:

Body: Steel 铆体: 铁
Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:


Body: Zinc Plated 铆体: 镀锌
Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSNC-4.8x12.0	20.2	3.17-8.41	9.20	2.00	3.10	4.9-5.1	5.4	4.0
	SSNC-4.8x14.0	26.5	3.17-12.22					5.4	4.0
6.4 (1/4")	SSN-6.4x17.0	28.3	4.32-12.06	11.4	2.2	4.10	6.7-7.0	10.5	8.2

BBN

全不锈钢口杯型内锁拉丝铆钉 Stainless Steel Body And Stainless Steel Mandrel (Now-lock Dome Head)



MATERIAL/材质:

Body:302 Series Stainless Steel

铆体: 302不锈钢

Mandrel: 302 Series Stainless Steel

钉芯:302不锈钢

FINISH/表面颜色:

Body: Natural 铆体:本色


Mandrel: Natural 钉芯:本色



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	BBN-4.8x10.0	18.2	1.58-6.85	10.20	2.30	3.10	4.9-5.1	6.0	4.5
	BBN-4.8x14.0	24.6	1.58-11.09					6.0	4.5
6.4 (1/4")	BBN-6.4x14.0	25.3	2.04-9.52	13.5	2.9	4.10	6.7-7.0	10.5	8.2
	BBN-6.4x20.0	35.6	2.04-15.87					10.5	8.2

BBNC

全不锈钢口杯型沉头内锁拉丝铆钉 Stainless Steel Body And Stainless Steel Mandrel (Now-lock CSK Head)

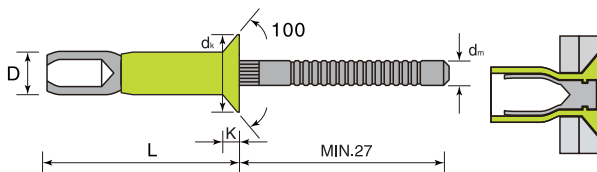

MATERIAL/材质:

Body:302 Series Stainless Steel

铆体: 302不锈钢

Mandrel: 302 Series Stainless Steel

钉芯:302不锈钢

FINISH/表面颜色:

Body: Natural 铆体:本色


Mandrel: Natural 钉芯:本色



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	BBNC-4.8x12.0	20.2	3.17-8.41	9.20	2.00	3.10	4.9-5.1	6.0	4.5
	BBNC-4.8x14.0	26.5	3.17-12.22					6.0	4.5
6.4 (1/4")	BBN-6.4x17.0	28.3	4.32-12.06	11.4	2.2	4.10	6.7-7.0	10.5	8.2

SSM

全铁口杯型外锁拉丝铆钉 Steel Body And Steel Mandrel (Mono-lock Dome Head)



MATERIAL/材质:

Body: Carbon Steel 铆体: 铁
Mandrel: Carbon Steel 钉芯: 铁

FINISH/表面颜色:


Body: Zinc Plated 铆体: 镀锌
Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSM-0604	18.2	1.63-6.86	10.10	2.10	3.10	4.9-5.1	5.8	4.1
	SSM-0607	24.4	1.63-11.10					5.8	4.1
6.4 (1/4")	SSM-0806	23.7	2.03-9.53	13.3	2.9	4.10	6.7-7.0	10.5	8.2
	SSM-0810	32.9	2.03-15.87					10.5	8.2

SSMC

全铁口杯型沉头外锁拉丝铆钉 Steel Body And Steel Mandrel (Mono-lock CSK Head)

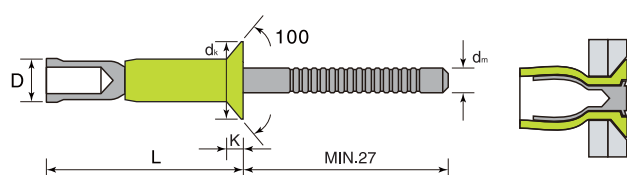

MATERIAL/材质:

Body: Carbon Steel 铆体: 铁
Mandrel: Carbon Steel 钉芯: 铁

FINISH/表面颜色:


Body: Zinc Plated 铆体: 镀锌
Mandrel: Zinc Plated 钉芯: 镀锌



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	SSMC-0606	20.2	3.17-8.41	8.50	2.20	3.10	4.9-5.1	5.8	4.1
	SSMC-0608	26.5	3.17-12.22					5.8	4.1
6.4 (1/4")	SSMC-0808	28.3	4.32-12.06	10.1	2.4	4.10	6.7-7.0	10.5	8.2

BBM

全不锈钢口杯型外锁拉丝铆钉 Stainless Steel Body And Stainless Steel Mandrel (Mono-lock Dome Head)



MATERIAL/材质:

Body: stainless steel 铆体: 不锈钢

Mandrel: stainless steel 钉芯: 不锈钢

FINISH/表面颜色:

Body: natural 铆体: 本色


Mandrel: natural 钉芯: 本色



D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	BBM-0604	18.2	1.63-6.86	10.10	2.10	3.10	4.9-5.1	6.0	4.5
	BBM-0607	24.4	1.63-11.10					6.0	4.5
6.4 (1/4")	BBM-0806	23.7	2.03-9.53	13.3	2.9	4.10	6.7-7.0	10.5	8.2
	BBM-08010	32.9	2.03-15.87					10.5	8.2

BBMC

全不锈钢口杯型沉头外锁拉丝铆钉 Stainless Steel Body And Stainless Steel Mandrel (Mono-lock CSK Head)

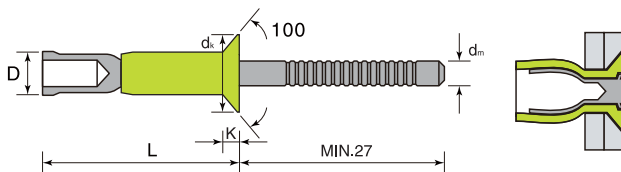

MATERIAL/材质:

Body: 304 Series Stainless Steel

铆体: 304 不锈钢

Mandrel: 302 Series Stainless Steel

钉芯: 302 不锈钢

FINISH/表面颜色:

Body: Natural 铆体: 本色

Mandrel: Natural 钉芯: 本色





D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	Shear (KN)	Tensile (KN)
		MAX.	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.8 (3/16")	BBMC-0606	20.0	3.17-8.41	8.50	2.20	3.10	4.9-5.1	5.8	4.1
	BBMC-0608	26.2	3.17-12.22					5.8	4.1
6.4 (1/4")	BBMC-0808	26.4	3.17-12.07	10.1	2.4	4.10	6.7-7.0	10.5	8.2

ALL ALUMINUM TRI-LUK TYPE

全铝灯笼型抽芯铆钉

AAT

全铝灯笼型抽芯铆钉 All Aluminum Tri-luk Type



MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Aluminum 钉芯: 铝

FINISH/表面颜色:

Body: Natural 铆体: 本色

Mandrel: Natural 钉芯: 本色




D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE (DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
4.0 (5/32")	AAT4014	14.0	1.0-3.0	8.4	1.7	2.5	4.2-4.5	600	700
	AAT4016	16.0	1.0-5.0						
	AAT4018	18.8	1.5-7.5						
	AAT4020	20.8	1.5-9.5						
	AAT4025	25.0	2.0-13.0						
4.8 (3/16")	AAT4016	16.0	1.0-4.0	10.1	2.0	3.0	5.1-5.3	800	1100
	AAT4018	18.0	1.0-6.0						
	AAT4020	20.5	1.0-8.5						
	AAT4025	25.0	1.5-12.5						
5.0 (13/67")	AAT5016	16.0	1.0-4.0	11	2.3	3.0	5.3-5.5	1000	1300
	AAT5018	18.0	1.0-6.0						
	AAT5020	20.5	1.0-8.5						
	AAT5025	25.0	1.5-12.5						

PEEL TYPE SERIES

拉花型抽芯铆钉系列

ASP

铝铁拉花型抽芯铆钉 Aluminum/Steel Peel Type

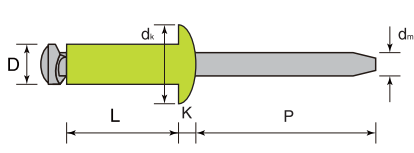

MATERIAL/材质:

Body: Aluminum 铆体: 铝

Mandrel: Steel 钉芯: 铁

FINISH/表面颜色:

Body: Polished 铆体: 抛光

Mandrel: Zinc Plated 钉芯: 镀锌





D	L			dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH	GRIP RANGE	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE(DRILL)	Shear (N)	Tensile (N)
		[+1/-0]	MIN-MIX		MAX.	MAX.	Φ	MIN.	MIN.
3.2 (1/8")	ASP3210	10.0	1.0-5.0	5.8-6.7	1.3	2.00	3.4-3.5	500	700
	ASP3212	12.0	3.0-7.0						
	ASP3214	14.0	5.0-9.0						
	ASP3216	16.0	7.0-11.0						
	ASP3218	18.0	9.0-13.0						
4.0 (5/32")	ASP4010	10.0	2.0-6.5	6.9-8.4	1.7	2.40	4.2-4.4	850	1000
	ASP4012	12.0	3.5-8.5						
	ASP4014	14.0	5.5-10.5						
	ASP4016	16.0	6.0-12.5						
	ASP4018	18.0	9.5-14.5						
	ASP4020	20.0	11.5-16.5						
4.8 (3/16")	ASP4810	10.0	1.5-4.0	8.3-10.1	2.0	2.90	5.25-5.45	1700	1700
	ASP4812	12.0	2.0-6.0						
	ASP4815	15.0	3.0-9.0						
	ASP4818	18.0	5.0-11.0						
	ASP4821	21.0	8.0-15.0						
	ASP4825	25.0	12.0-19.0						
	ASP4827	27.0	14.0-21.0						
	ASP4830	30.0	16.0-24.0						
	ASP4835	35.0	20.0-28.0						

GROOVED TYPE SERIES

沟槽型系列

ASG

铝铁沟槽型抽芯铆钉 Aluminum/Steel Grooved Type



MATERIAL/材质:

Body: Aluminum 铆体:铝
Mandrel: Steel 钉芯:铁

FINISH/表面颜色:

Body: Polished 铆体:抛光
Mandrel: Zinc plated 钉芯:镀锌




D		L		dk	k	dm			
RIVET SIZE	PART NUMBER	RIVET LENGTH [+1/-0]	GRIP RANGE MIN-MIX	HEAD DIA	HEAD HEIGHT MAX.	MANDREL DIA MAX.	HOLE SIZE (DRILL) Φ	Shear (N) MIN.	Tensile (N) MIN.
3.2 (1/8")	ASG3206	6.0	9.5	5.8-6.7	1.3	2.00	3.4-3.5	500	700
	ASG3208	8.0	11.5						
	ASG3210	10.0	13.5						
	ASG3212	12.0	15.5						
	ASG3214	14.0	17.5						
	ASG3216	16.0	19.5						
4.0 (5/32")	ASG4006	6.0	10	6.9-8.4	1.7	2.5	4.2-4.4	850	1200
	ASG4008	8.0	12						
	ASG4010	10.0	14						
	ASG4012	12.0	16						
	ASG4014	14.0	18						
	ASG4016	16.0	20						
	ASG4018	18.0	22						
	ASG4020	20.0	24						
4.8 (3/16")	ASG4806	6.0	10.5	8.3-10.1	2.0	3.0	5.1-5.2	1500	1800
	ASG4808	8.0	12.5						
	ASG4810	10.0	14.5						
	ASG4812	12.0	16.5						
	ASG4814	14.0	18.5						
	ASG4816	16.0	20.5						
	ASG4818	18.0	22.5						
	ASG4820	20.0	24.5						
	ASG4825	25.0	29.5						

RING GROOVE TYPE SERIES

环槽型系列

RG

环槽型抽芯铆钉 Ring Groove Rivet

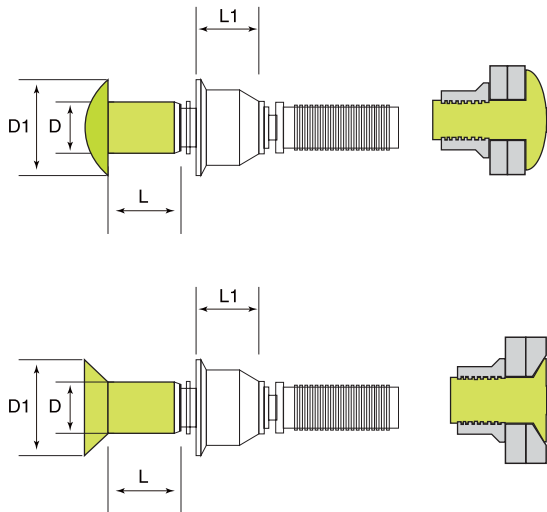

MATERIAL/材质:

Body: 304 Series Stainless Steel

铆体: 304不锈钢

Mandrel: 302 Series Stainless Steel

钉芯: 302不锈钢

FINISH/表面颜色:

Body: Natural 铆体: 本色

Mandrel: Natural 钉芯: 本色



D	L	预制孔径 预制孔径120° 沉孔	铆接范围	dk	K	最小抗拉力T(N)		最小抗剪力S（N）	
					MIN	STEEL	SUS304	STEEL	SUS304
φ 5.0±0.08	4-18	φ 5.1-5.3	L±0.5	φ 9.5±0.3	3	5000	7000	7000	9000
φ 6.4±0.1	4-26	φ 6.5-6.7	L±0.5	φ 12.5±0.3	3.6	8500	11000	10000	13500
φ 8.0±0.1	6-20	φ 8.2-8.4	L±0.5	φ 16.0±0.5	4.8	18500	—	20000	—
φ 10.0±0.15	6-20	φ 10.1-10.3	L±0.5	φ 19.0±0.5	6	2000	21500	25000	30000



■ 抽芯铆钉/Blind Rivets

材质：铁、不锈钢、铝、铜。

Material: Steel, Stainless Steel, Aluminum, Copper.

标准铆钉：开口型、封闭型。

Standard Rivets: open type, Closed End Type.

结构铆钉：双股铆钉、拉花铆钉、沟槽铆钉、单股铆钉、拉丝铆钉、海马铆钉、快速铆钉。

Structure Rivets: Multigrip Type, Peel Type, Grooved Type, Unigrip Type, Monobolt Type, Hem-fix Type, Speed Rivets, Ring-Grooved Lockbolt, Bulbex.

Blind Rivet Nuts

Blind Rivets

Self-Chinching

Weld Studs

Rivet tools